



Brussels, 13.2.2019
SWD(2019) 29 final

PART 1/4

COMMISSION STAFF WORKING DOCUMENT

Report on the Assessment of the Member States National Policy Frameworks for the development of the market as regards alternative fuels in the transport sector and the deployment of the relevant infrastructure pursuant to Article 10 (2) of Directive 2014/94/EU

COMMISSION STAFF WORKING DOCUMENT

Report on the Assessment of the Member States National Policy Frameworks for the development of the market as regards alternative fuels in the transport sector and the deployment of the relevant infrastructure pursuant to Article 10 (2) of Directive 2014/94/EU

Disclaimer

This updated version includes the evaluations of the National Policy Frameworks submitted by Greece, Malta, Romania, and Slovenia. These National Policy Frameworks could not be taken into account for the initial version of this Staff Working Document (SWD/2017/0365 final). The developments in other Member States occurred since the date of the adoption of this SWD (8 November 2017) have not been taken into account.

Contents

<u>1</u>	<u>METHODOLOGY FOR THE ASSESSMENT OF NPFS</u>	2
<u>1.1</u>	<u>Qualitative assessment methodology</u>	3
<u>1.2</u>	<u>Quantitative assessment methodology</u>	5
<u>2</u>	<u>METHODOLOGY FOR THE ASSESSMENT OF EU-WIDE IMPACTS FROM ALL NPFS</u>	9
<u>2.1</u>	<u>Method to assess a minimum infrastructure across the EU</u>	9
<u>2.2</u>	<u>Method to assess the fostering of deployment of alternative fuels vehicles and vessels</u>	10
<u>2.3</u>	<u>Method to assess the promotion of the deployment of alternative fuels infrastructure in public transport services</u>	10
<u>2.4</u>	<u>Method to assess the support to EU climate and energy objectives</u>	10
<u>2.5</u>	<u>Method to assess air quality improvements</u>	11
<u>2.6</u>	<u>Method to assess the strengthening of the EU's competitiveness and jobs</u>	12
<u>3</u>	<u>OVERVIEW OF TARGETS, OBJECTIVES AND LEVEL OF ATTAINMENT FROM ALL NPFS</u>	15
<u>4</u>	<u>OVERALL CONTRIBUTION OF NPFS TO EU POLICY TARGETS</u>	21

1 METHODOLOGY FOR THE ASSESSMENT OF NPFs

Alternative fuels are key to improving the EU's security of energy supply, reducing the impact of transport on the environment and boosting EU competitiveness. They are also an important building block for the EU's transition towards a low-carbon economy.

Directive 2014/94/EU of the European Parliament and of the Council of 22 October 2014 on the deployment of alternative fuels infrastructure¹ (hereafter referred to as 'Directive'), requires that Member States provide a minimum infrastructure for alternative fuels such as electricity, hydrogen and natural gas. In accordance with Article 3 of the Directive the Member States had to notify to the Commission by 18 November 2016 their National Policy Frameworks (NPFs). In their NPFs the Member States should outline their national targets and objectives, and supporting actions for the development of the market as regards alternative fuels, including the deployment of the necessary infrastructure to be put into place.

The Directive sets a regulatory framework for the following fuels:

Electricity: Since 2010, electric vehicles have become a common sight on European roads. The Directive requires Member States to set targets for recharging points accessible to the public, to be deployed by 2020, to ensure that electric vehicles can circulate at least in urban and suburban agglomerations. Targets should ideally foresee a minimum of one recharging point per ten electric vehicles.

Compressed Natural Gas (CNG): Since more than a decade CNG vehicles and buses are deployed in several Member States. The Directive requires Member States to ensure a sufficient number of publicly accessible refuelling points, with common standards, to be built to allow the circulation of CNG vehicles, both in urban and sub-urban areas (by end-2020) as well as on the TEN-T (Trans-European Transport Network) core network, approximately every 150 km (by end-2025).

Liquefied Natural Gas (LNG): Natural gas/bio-methane vehicles offer today a well-developed technology, with performances and cost equivalent to petrol or diesel units and with cleaner exhaust emissions. Natural gas use in trucks and ships can substitute diesel. For the development of LNG for road transport, Member States have to ensure a sufficient number of publicly accessible refuelling points, with common standards, on the TEN-T core network, approximately every 400 km, to be built by end-2025. The Directive also requires a minimum coverage to ensure accessibility of LNG in main maritime and inland ports.

Hydrogen: The Directive aims at ensuring a sufficient number of publicly accessible refuelling points, with common standards, in the Member States who opt for hydrogen infrastructure, to be deployed by end-2025.

Besides the NPF, the Directive addresses common EU-wide standards for equipment needed and user information. These latter two aspects are not part of the NPFs and therefore are not covered in this SWD.

The Directive aims at facilitating a functional internal market for alternative fuel vehicles and technology, and infrastructure build-up. The targets and objectives of the NPF can have an impact on the following:

- creating a minimum level of recharging and refuelling infrastructure across the EU including cross-border continuity and enabling market uptake of alternative fuel transport systems,
- the achievement of EU climate and energy objectives,
- improvement of air quality,

¹ OJ L 307, 28.10.2014, p. 1.

- strengthening the EU's competitiveness and jobs.

Figure 1-1 schematically demonstrates how the estimates, targets and measures for the alternative fuel vehicles and alternative fuels infrastructure described in the NPFs interact and how these combined impact EU wide goals.

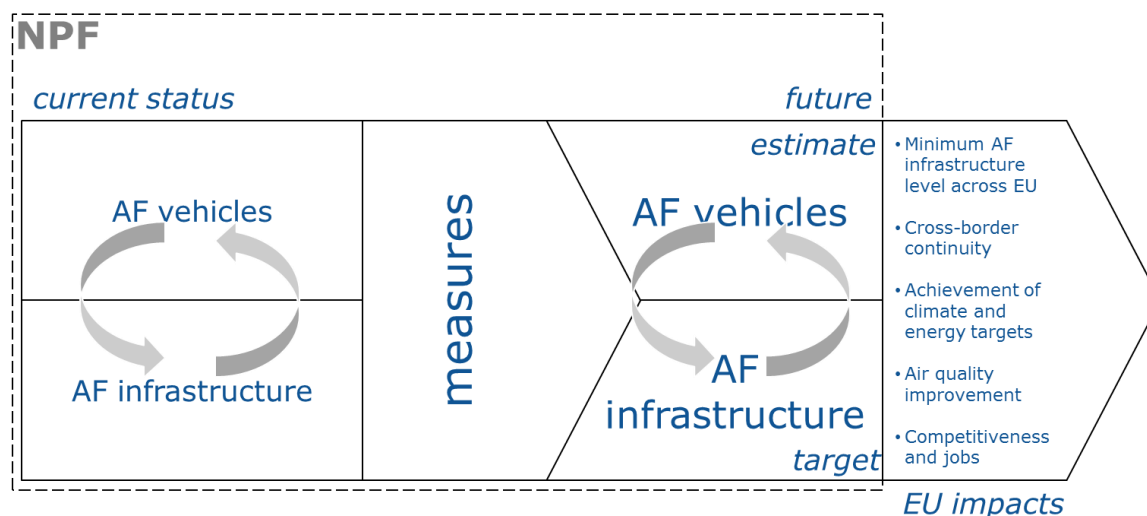


Figure 1-1: Interaction of various aspects covered in the NPF and resulting impacts

The methodology for the assessment of the National Policy Frameworks (NPFs) is organised in two work streams, a qualitative assessment that checks if the NPF covers all elements as regulated by the Directive and a quantitative assessment that evaluates if a given Member State, through its targets and existing or planned measures, sufficiently supports the aim of the Directive to achieve a minimum level of alternative fuels infrastructure across the EU and cross-border continuity. All NPFs that have been notified to the Commission have been considered in this document (the ones notified by 1st October 2017 but also the ones notified after this date, namely Greece, Malta, Romania, and Slovenia). The following sub-sections explain the methods employed.

1.1 Qualitative assessment methodology

The qualitative assessment of the NPFs covers the completeness of the NPFs vis-à-vis the requirements of the Directive. For this purpose, a checklist was used (see table 1-1). The checklist summarizes the information if the NPF of a given Member State covers all elements as requested in Article 3 of the Directive.

Table 1-1: NPF Checklist

Article of the Directive	Requirement	Mode of transport	Alternative Fuel	Yes	No	N.A./N.M.	Notes	Page
3(1)-first indent	Assessment of the current state and future development of the market as regards alternative fuels in the transport sector, including in light of their possible simultaneous and combined use, and of the development of alternative fuels infrastructure, considering, where relevant, cross-border continuity	All	All					
3(2)	Consideration of the needs of the different transport modes existing on the MS territory, including those for which limited alternatives to fossil fuels are available	All	All					
3(1)-second indent	Establishing Targets per Alternative Fuel							
	Electricity supply for transport							
4(1)	Definition of an appropriate number of recharging points accessible to the public to be put in place by 31 December 2020 - in urban/suburban agglomerations and other densely populated areas	Road	Electricity					
4(1)	within networks determined by the MS	Road	Electricity			N.M.		
4(1)	at public transport stations	Road	Electricity			N.M.		
	Hydrogen supply for transport							
5(1)	Does Member State decide to include hydrogen refuelling points in their national policy frameworks?	Road	Hydrogen					
5(1)	Definition of an appropriate number of refuelling points accessible to the public to be put in place by 31 December 2025	Road	Hydrogen					
5(1)	cross-border links	Road	Hydrogen					
	Natural Gas supply for transport							
6(1)	Definition of an appropriate number of refuelling points for LNG to be put in place by 31 December 2025 at maritime ports, to enable LNG inland waterway vessels or seagoing ships to circulate throughout the TEN-T Core Network	Maritime ports	LNG					
6(2)	Definition of an appropriate number of refuelling points for LNG to be put in place by 31 December 2030 at inland ports, to enable LNG inland waterway vessels or seagoing ships to circulate throughout the TEN-T Core Network	Inland ports	LNG					
6(3)	Designation of maritime and inland ports that are to provide access to the refuelling points for LNG	Maritime and Inland ports	LNG					
6(3)	consideration of market needs	Maritime and Inland ports	LNG					
6(1) and 6(2)	Cooperation among neighboring Member States to ensure adequate coverage of the TEN-T Core Network	Maritime and Inland ports	LNG					
6(4)	Definition of an appropriate number of refuelling points for LNG accessible to the public to be put in place by 31 December 2025 at least along the existing TEN-T Core Network (for heavy duty vehicles) where there is demand	Road	LNG				cost and benefits (also environmental) considered?	
6(6)	Definition of an appropriate LNG distribution system on the national territory, including loading facilities for LNG tank vehicles, in order to supply the refuelling points installed for inland and maritime vessels and heavy duty trucks (requirement could be covered by a pool of neighboring Member States by way of derogation)	Road	LNG					
6(7)	Definition of an appropriate number of CNG refuelling points accessible to the public to be put in place by 31 December 2020 in urban/suburban areas and other densely populated areas	Road	CNG					
	within networks determined by the MS	Road	CNG			N.M.		
6(8)	Definition of an appropriate number of CNG refuelling points accessible to the public to be put in place by 31 December 2025, at least along the existing TEN-T Core Network	Road	CNG					
3(1)	Assessment of the need of alternative fuel infrastructures							
4(5)	Assessment of the need for shore-side electricity supply for inland waterway vessels and seagoing ships in maritime and inland ports. Priority of installation in ports of the TEN-T Core Network and in other ports by 31 December 2025.	Inland and maritime ports	Electricity				cost and benefits (also environmental) considered?	
3(1)-eighth indent	Consideration of the need to install electricity supply at airports for use by stationary airplanes	Airports	Electricity					
3(1)-seventh indent	Assessment of the need to install refuelling points for LNG in ports outside the TEN-T Core Network	Inland and maritime ports	LNG					
3(1)	Designation of areas to be equipped with alternative fuel infrastructures							
3(1)-fifth indent	Designation of the urban/suburban agglomerations, of other densely populated areas and of networks which, subject to market needs, are to be equipped with recharging points accessible to the public in accordance with Article 4(1)	Road	Electricity					
3(1)-sixth indent	Designation of the urban/suburban agglomerations, of other densely populated areas and of networks which, subject to market needs, are to be equipped with CNG refuelling points in accordance with Article 6(7)	Road	CNG					
3(1)	Definition of measures to support the deployment of alternative fuels							
3(1)-third indent	Measures necessary to ensure that the national targets and the objectives contained in the national policy framework are reached	Road	Electricity					
			CNG					
			LNG					
			Hydrogen					
		Maritime	Shore Side Electricity					
			LNG					
		Inland Waterway	Shore Side Electricity					
			LNG					
		Airports	Electricity for stationary airplane					
3(1)-fourth indent	Measures that can promote the deployment of alternative fuels infrastructure in public transport services	Road	Electricity					
			CNG					
			LNG					
			Hydrogen					
4(3)	Measures to encourage and facilitate the deployment of recharging points not accessible to the public (private electro mobility infrastructure)	Road	Electricity					
3(3)	Provided evidence whether the interests of regional and local authorities, as well as those of the stakeholders concerned has been considered	All	All					
3(4)	Assessment of MS cooperation and coordination with other member states	All	All			N.M.		

1.2 Quantitative assessment methodology

The quantitative assessment of the NPFs analyses if the NPF of a given Member State has established infrastructure targets that meet minimum requirements in terms of coverage and/or their relation to estimated future alternative fuelled vehicles. It also analyses if the existing or planned support actions or measures seem sufficient and are coherent with the vehicle estimates and infrastructure targets.

1.2.1 Infrastructure sufficiency assessment method

The requirements, as documented in the table below, were used to assess the sufficiency of the infrastructure targets as established in the NPF.

Table 1-2: Infrastructure sufficiency requirements

Mandatory?	Fuels	Objectives / Distance requirement
Yes	Electricity for vehicles	One recharging point per estimated ten electric vehicles (and for information purposes: at least every 60 km ² on TEN-T Core Network)
Yes	CNG	At least every 150 km on TEN-T Core Network and one CNG refuelling point per estimated 600 CNG vehicles ³
Yes	LNG for vehicles	At least every 400 km on TEN-T Core Network
Yes	LNG for maritime vessels	Coverage of maritime ports with mobile or fix installations to enable the circulation on TEN-T Core Network
Yes	LNG for inland waterway vessels	Coverage of inland ports with mobile or fix installations to enable the circulation on the TEN-T Core Network
No	Hydrogen	At least every 300 km on TEN-T Core Network

In this assessment step, it is also captured if and how a Member State has undertaken the designation of densely populated areas to be equipped with public recharging/refuelling points.

1.2.2 Measure assessment method

A key aspect of the Directive is that the Member States are asked to plan and adopt measures to support the achievement of the targets and objectives of their NPF. The Directive explicitly refers to measures targeting three different aspects:

- measures necessary to ensure that the national targets and the objectives contained in the NPF are reached,
- measures that can promote the deployment of alternative fuels infrastructure in public transport services,
- measures to encourage and facilitate the deployment of recharging points not accessible to the public.

² This value is derived from field test data from various EU countries and it can be reasonably assumed that it would remove range anxiety concerns. See for more details: JRC (2015) Individual mobility: From conventional to electric cars. Available at: http://publications.jrc.ec.europa.eu/repository/bitstream/JRC97690/eur_27468_en_online_v3.pdf

³ Current average ratio in Member States between conventional vehicles and gasoline/diesel refuelling points is 600 to one (one fuel station typically has several refuelling points).

The measures, defined by a Member State in its NPF, are assessed in terms of their adoption status, scope, and comprehensiveness⁴. For the adoption status, the following four categories are differentiated: existing, adopted but not yet in effect, in process of adoption, and under consideration. The scope of the measures consists of two dimensions: coverage and effect. Coverage is an indicator of the number or share of vehicles or refuelling/recharging points eligible to benefit from the measure. Effect is an indicator of how much a measure could influence the purchase or investment decision for a given alternative fuelled vehicle or refuelling/recharging point. In the analysis, each measure is assigned one of the following scores: low, medium or high. Financial and nonfinancial measures are considered in the assessment. The overall measure comprehensiveness is assessed by fuel and mode. Comprehensiveness indicates by how much the totality of measures for a given fuel and mode addresses various deployment barriers. The score for comprehensiveness is binary: comprehensive/not comprehensive.

Measures are assessed individually by fuel and mode. For a given fuel/mode pair and aim (support to attainment of targets, public transport, non-public recharging points), they are clustered and receive an overall score that can be low, medium or high.

a. Assessing Single Measures

The individual measures are assessed in terms of status and scope.

Measure status can take three values:

- Low (L): measure is under consideration,
- Medium (M): measure is adopted or in process of adoption,
- High (H): measure is in effect.

Measure scope is evaluated against two dimensions, i.e. coverage (maximum eligible number or share of infrastructure items or vehicles) and effect (quantification of the impact, e.g., change in cost versus no-measure case), as can be seen in the table below.

Table 1-3: Criteria for Determining the Scope of a Measure

	Alternative Fuels Infrastructure	Alternative Fuels Vehicles
Coverage	Max number of recharging/refuelling points eligible	Max number/share of vehicles eligible
Effect (Financial Measures)	Investment Cost Difference versus no-measure case	TCO (=Total Cost of Ownership) or Cost Difference versus no-measure case
Effect (Nonfinancial Measures)	Qualitative	Qualitative

Coverage can be assessed for all measure types alike, whereas effect is defined in quantitative terms for financial measures only and needs to be assessed qualitatively for nonfinancial measures. All measures are assessed against both dimensions, coverage and effect, assigning them to one of the categories low/medium/high for each dimension. For coverage, category thresholds are defined based on the maximum number of refuelling/recharging points or vehicles eligible relative to the number of points or vehicles that need to be added to reach the Member States' NPF targets. The thresholds for coverage have been defined as follows: number of refuelling/recharging points or number of vehicles (as share) in scope for measure (<10% low, 10% – 50% medium, >50% high). For the effect, for financial measures, thresholds are based on the % investment cost, TCO or purchase price decrease brought about by the measure (versus absence of measure). The corresponding threshold values for the likely impact on deployment or development decisions by market actors have been defined as follows: impact on TCO

⁴ Here, only the measures that target one of the three above described aspects are assessed.

difference versus conventional benchmark vehicle or for infrastructure investment cost (<10% low, 10% - 50% medium, > 50% high). For nonfinancial measures, the effect is judged qualitatively.

Then, for each measure where evaluations could be derived for status, coverage and effect, its expected overall impact is assessed based on the three scores, as shown in the table below. Following the precautionary principle, the overall measure impact is determined by the lowest evaluation the measure has received regarding its three attributes status, coverage and effect. For example, if the measure has a high coverage and effect but is only under consideration (thus low adoption status), the overall measure assessment will be ‘low’ because it cannot be guaranteed that it will ever come into effect. Likewise, if its status is high (measure in effect) but the measure covers only few infrastructure items or has a low effect, its overall assessment will also be ‘low’. Overall measure assessment will be ‘high’ only if all three attributes are evaluated as ‘high’.

Table 1-4: Assessment of Expected Overall Measure Impact

Measure	Status	Scope		Overall Measure Assessment
		Coverage	Effect	
MF _{1,1,1}	H	H	H	H
MF _{1,2,1}	L	any	any	L
MF _{2,1,1}	M	H or M	H or M	M
...				

Figure 1-2 presents the flowchart for the assessment of a measure. The measures are clustered by:

- type (indexed by i),
 - Measures necessary to ensure that the national targets and the objectives contained in the NPF are reached (Art. 3 (1) 3rd indent), labelled M₁,
 - Measures that can promote the deployment of alternative fuels infrastructure in public transport services (Art. 3 (1) 4th indent), labelled M₂,
 - Measures that can promote the deployment of private electro-mobility infrastructure (Art. 4 (3)), labelled M₃,
- alternative fuel (indexed by j), and
- mode of transport (indexed by k).

The measures M_{i,j,k} are classified as financial (MF) and nonfinancial (MNF) measures. Each measure receives three scores: S1 for status, S2 for coverage and S3 for effect. While for financial measures, the scope assessments, i.e. scores S2 and S3, are obtained on the basis of quantitative indicators, for nonfinancial measures, only score S2 can be obtained quantitatively. For nonfinancial measures, the score S3 for effect is based on qualitative indicators. The measure scores S1, S2 and S3 can only be determined correctly where a complete set of information is available. As explained above, the overall measure score S₀ is the minimum value of the three scores.

ASSESSMENT OF A MEASURE FROM NPF OF A MS

Measure type, i:

i=1 => ensuring national targets and objectives,

i=2 => AFI for public transport ,

i=3 => private electro-mobility infrastructure

Alternative Fuel, j:

j=1 => Electric, j=2 => CNG, j=3 => LNG, j=4 => H2, j=5 => LPG,

j=6 => Biofuels

Mode of Transport, k:

k=1 => road, k=2 => water, k=3 => air, k=4 => rail

Scores: S1, S2, S3

Values:

- L - low,
- M - medium
- H - high

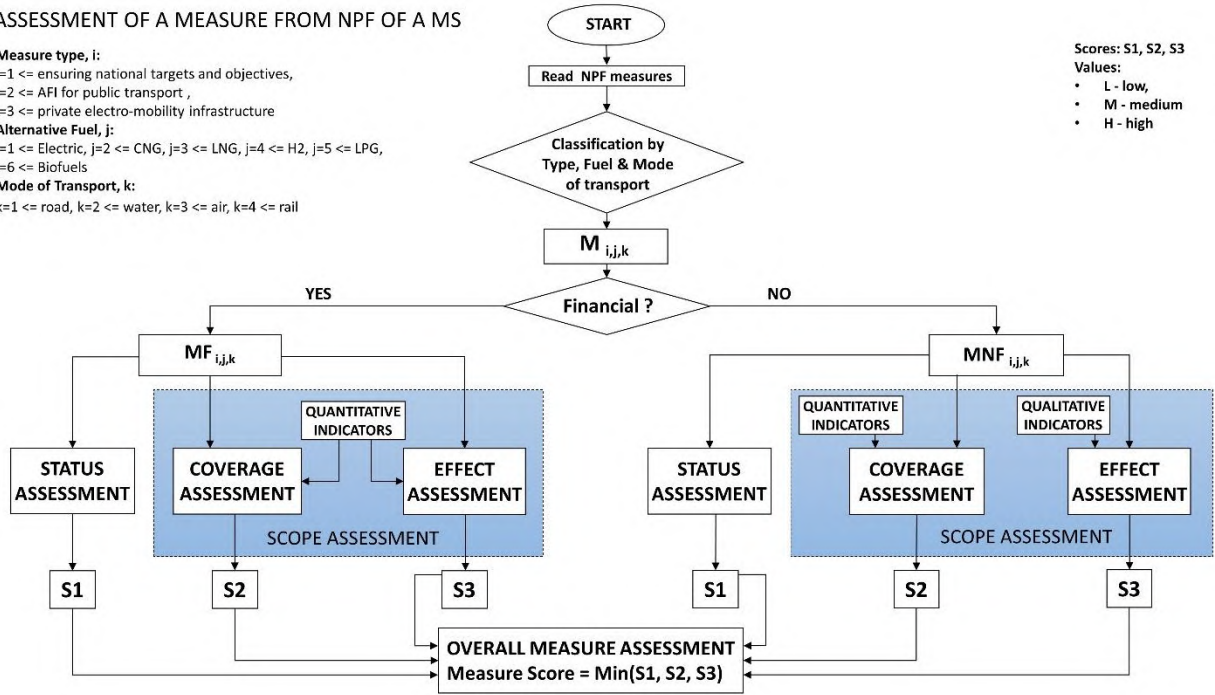


Figure 1-2: Workflow of overall measure assessment

b. Overall Measure Score and Comprehensiveness

For each cluster, the maximum score of all individual overall measure scores (S_0) is taken as the cluster score. As a consequence, if a Member State has defined for a given fuel/mode and aim cluster one measure with a high adoption status, high coverage, and high effect, the total score for the cluster would also be high. Comprehensiveness indicates by how much the totality of measures for a given fuel and mode addresses various deployment barriers. It will take into account whether both infrastructure and vehicles are addressed or just one of them, what part of the vehicle population is addressed (e.g. for cars, whether private cars, company cars, commercial cars or several groups are subject to measures), and if financial as well as nonfinancial incentives are provided for within a cluster. The score for comprehensiveness is binary: comprehensive/not comprehensive. The comprehensiveness assessment is independent of the measure score. It is possible that a Member State defines a very comprehensive package of measures addressing a cluster but the total score for all measures could be low.

2 METHODOLOGY FOR THE ASSESSMENT OF EU-WIDE IMPACTS FROM ALL NPFs

Possible impacts of all NPFs combined on the following EU-wide goals are assessed: (i) achieving a minimum level of refuelling and recharging infrastructure across the EU including cross-border continuity and enabling market uptake of alternative fuels transport systems; (ii) support to the achievement of EU climate and energy objectives; (iii) improvement of air quality; (iv) strengthening the EU's competitiveness and jobs in the alternative fuels infrastructure sector.

To this end, the targets and objectives from the different Member States' NPFs were used as input to models and calculation tools in order to derive the estimated impacts. The following sub-sections provide an overview on the models and calculation tools employed.

2.1 Method to assess a minimum infrastructure across the EU

The aim of this evaluation step is to verify if there remain any gaps in the EU-wide availability of refuelling and recharging infrastructure. The analysis builds upon the infrastructure sufficiency assessment derived from the Member States' NPFs. The results of this analysis are displayed through summary tables for infrastructure sufficiency, results of the measure assessment and selected maps for specific fuels/modes.

The EU-wide analysis is carried out in four steps:

- identifying potential within-country gaps, based on a summary of Member State analysis,
- identifying potential cross-border gaps along the TEN-T network, based on the information provided in the NPFs and the minimum requirements given in Table 1-2 for the mandatory fuels infrastructure,
- calculation of a normalised difference index in order to describe differences in infrastructure density between Member States (see Box 2-1),
- summarising information on Member States which have chosen to provide hydrogen infrastructure in order to identify potential coherent areas with hydrogen availability.

Box 2-1: Calculation of normalised difference index to describe differences in infrastructure density between Member States

A quantitative description of differences of Member States' recharging or refuelling infrastructure density is given by a normalized difference index (NDI), calculated as:

$$NDI = |I1 - I2| / (I1 + I2),$$

where I = Number of AFI / Number of km of road network for a Member State (here Member States 1 and 2).

The index takes values between "0" in case of the same density of infrastructure in two Member States and "1" in case one of the Member States has no infrastructure. A threshold NDI value can be defined to identify important discontinuities in infrastructure density, e.g. NDI=0.2 which indicates that one Member State has a 1.5 times higher infrastructure density than its neighbour.

2.2 Method to assess the fostering of deployment of alternative fuels vehicles and vessels

The estimates from the individual NPFs are combined in an EU-wide view. The individual estimates are normalised and expressed as the share of alternative fuels vehicles/vessels per total stock in each Member State. Maps are generated to check how coherent or divergent the estimates are at Union level.

2.3 Method to assess the promotion of the deployment of alternative fuels infrastructure in public transport services

The information on the promotion of the deployment of alternative fuels infrastructure in public transport services from the individual NPFs is combined in an EU-wide view. The various priorities of the Member States' NPFs are listed. Coherence or divergence of promotion measures at Union level is qualitatively assessed.

2.4 Method to assess the support to EU climate and energy objectives

The future alternative fuels vehicle/vessel estimates and infrastructure targets from the NPF of each Member State are used as exogenous projected fleet shares in fleet impact calculation tools. Their impacts in terms of CO₂, other pollutant emissions, final energy mix for road transport, and reduction of fossil oil use are calculated versus an update of the EU Reference scenario 2016 without NPFs (so-called "scenario without NPFs")⁵.

For road transport, the JRC fleet impact model DIONE⁶ is used. It is a European Commission owned road transport fleet projection tool and has been used amongst others to support scenario work for the Communication on a European Strategy for low-emission mobility⁷. It allows analysing scenarios of future road vehicle stock, activity, energy consumption and CO₂ as well as air pollutant emissions up to 2050. DIONE was developed for assessing transport and energy (policy) options, such as fleet emission targets, vehicle technology transitions, alternative fuels mixes, scrappage schemes, etc. It builds on a detailed and flexible representation of vehicle types, their activities and efficiencies. DIONE can be employed to run scenarios varying in vehicle stock, new registrations, survival rates, activity, efficiency, fuel pathways for Well-to-Wheel (WtW) energy consumption and emissions, biofuel admixture shares, and driving patterns.

Scenarios can be run for any single Member State (plus some other neighbouring countries) and pre-defined groupings such as EU28, EU15 and EU12, but it is also possible to define custom scenarios for any region, city, country or other entity of interest.

The DIONE baseline is calibrated on the scenario without NPFs, developed with the PRIMES-TREMOVE transport model by ICCS-E3MLab. Fuel consumption and emission calculation for internal combustion engine vehicles is based on the COPERT⁸ road transport emission inventory software. For alternative fuels vehicles, an energy and emission calculation methodology has been developed which takes account of vehicle characteristics, trip lengths and speed distributions. For both energy consumption and greenhouse gas (GHG) emissions, DIONE can provide real world Tank-to-Wheel (TtW) results up to the year 2050 as well as Well-to-Wheel (WtW) results up to 2030. Well-to-Tank

⁵ The scenario without NPFs builds on the Baseline scenario of the Impact Assessment accompanying the Proposal for a Directive amending Directive 1999/62/EC on the charging of heavy goods vehicles for the use of certain infrastructures (SWD (2017) 180), and thus on the EU Reference scenario 2016, but excludes the incentives for alternative fuels provided at the Member State level. It has been developed with the PRIMES-TREMOVE model (i.e. the same model used for the EU Reference scenario 2016) by ICCS-E3MLab.

⁶ For more information see: Thiel, C., Drossinos, Y., Krause, J., Harrison, G., Gkatzoflias, D. and A.V. Donati (2016), Modelling electromobility: an integrated modelling platform for assessing European policies. Transport Research Procedia, DOI: <http://10.1016/j.trpro.2016.05.341>; Harrison, G., J. Krause, & C. Thiel (2016), Transitions and impacts of passenger car powertrain technologies in European member states. Transport Research Procedia, DOI: <http://10.1016/j.trpro.2016.05.418>

⁷ Communication on "A European Strategy for Low-Emission Mobility" [COM(2016)501] and accompanying Commission Staff Working Document [SWD(2016)244]

⁸ For more information see: <http://emisla.com/products/copert>

(WtT) emissions for fuels are aligned to the JRC-EUCAR-CONCAWE WtT data⁹. For light-duty vehicles' CO₂ emissions, type approval or real world values can be calculated. In this assessment only direct transport emissions, i.e. TtW results, were considered.

For waterborne transport and stationary airplanes, emission reductions and energy impacts were taken from the NPFs if the Member State provided these data. If not, emission and energy use factors were used to calculate the respective impacts. For stationary airplanes, the factors were derived based on calculations using emission and energy factors from ICAO¹⁰ (International Civil Aviation Organization). For shore-side electricity, factors were derived based on calculations from a study commissioned by DG Environment¹¹. For LNG for ships, factors were derived based on calculations from a study commissioned by DG MOVE¹².

The following key performance indicators are calculated and summarised for the snapshots 2020, 2025, and 2030: CO₂ reduction and reduction of fossil oil use versus the scenario without NPFs. As not all Member States provide estimates and targets for all snapshot years, some of the estimate/target numbers had to be inter- or extrapolated. As a general rule, if an NPF does not contain estimates beyond a given year, it was assumed that the alternative fuels vehicle or vessel number stays constant beyond that year.

2.5 Method to assess air quality improvements

The results on air pollutant emissions from the previous assessment step are used as input to subsequent calculations with the SHERPA (Screening for High Emission Reduction Potential on Air) model¹³ in order to assess air quality impacts. The results are displayed as difference maps of main pollutants versus a reference scenario without NPFs.

The SHERPA tool has been developed by the Joint Research Centre with the aim of supporting national, regional and local authorities in the design and assessment of their air quality plans. It particularly helps identifying the most efficient administrative scale for potential actions in a multi-level governance decision context. SHERPA allows for a rapid exploration of potential air quality improvements resulting from national/regional/local emission reduction measures.

The tool is based on simplified relationships between emissions and concentration levels, which can be used to answer the following questions:

⁹ For more information see: <http://iet.jrc.ec.europa.eu/about-iec/downloads>

¹⁰ The following factors were used: gate/position primarily used for short haul flights: yearly avoidance through the use of ground power and air climate units (replacing airplane's auxiliary power units(APU)): fuel -350t, CO₂ -1080t, NOx -3.1t, PM₁₀ -0.11t, HC -0.1t, CO -1.4t each per year and gate/position; for long haul flights: fuel -986t, CO₂ -3037t, NOx -7.9t, PM₁₀ -0.13t, HC -0.5t, CO -0.7t each per year and gate/position; for unspecified gate/position use the average of the values was taken. Basic energy/emission factors for APU use were taken from ICAO, Doc 9889 (2011), page 3-A1-24.

¹¹ The following factors for yearly fuel use/emission changes were used: for berths primarily used for small ships: electricity used: 1255MWh, MGO (marine gasoil) avoided: 285t, CO₂ -653t, NOx -14.8t, PM -0.35t, VOC -0.49t; for medium ships: electricity used: 3482MWh, MGO avoided: 791t, CO₂ -1811t, NOx -41.1t, PM -0.96t, VOC -1.36t; for large ships: electricity used: 8971MWh, MGO avoided: 2038t, CO₂ -4665t, NOx -105.9t, PM -2.48t, VOC -3.49t. All calculated from European Commission – DG ENV (2005). Service Contract on Ship Emissions: Assignment, Abatement and Market-based Instruments - Task 2a – Shore-Side Electricity.

¹² The following factors for yearly fuel use/emission changes were used: for ferries: LNG: 38000m³, MGO avoided: 18037t, CO₂ -14348t, NOx -859t, SO₂ -177t, PM₁₀ -12.6t, CH₄ +786t; for cruise ships: LNG: 90824m³, MGO avoided: 43110t, CO₂ -34293t, NOx -2052t, SO₂ -424t, PM₁₀ -30.1t, CH₄ +1879t; for cargo ships: LNG: 10,000m³, MGO avoided: 4747t, CO₂ -3776t, NOx -226t, SO₂ -47t, PM₁₀ -3.3t, CH₄ +207t. All calculated from European Commission – DG MOVE (2015). Study on the Completion of an EU Framework on LNG-fuelled Ships and its Relevant Fuel Provision Infrastructure - Lot 3 - Analysis of the LNG market development in the EU.

¹³ For more details see: <http://aqm.jrc.ec.europa.eu/sherpa.aspx>

- What is the potential for local action in my region?
- What are the priority activities, sectors and pollutants on which to take action?
- At which scale (national, regional, local, etc.) should I act to be more efficient?

The SHERPA tool is currently distributed with default EU-wide data for emissions and source-receptor relationships at 7x7 km² spatial resolution. Current data refer to 2010, and are related to a specific EU-wide air quality model and emission inventory.

SHERPA is used to evaluate the impact of the NPFs on air quality. As the current spatial resolution of the SHERPA model is 7x7 km², the focus is on the impact of NPFs on urban/regional background (i.e. not hot-spot) concentrations of PM₁₀, PM_{2.5}, and NO₂ in various areas in Europe.

2.6 Method to assess the strengthening of the EU's competitiveness and jobs

A computational model was developed for calculating the value creation and employment effects resulting from AFI build-up as described in the NPFs. It outputs Member States' domestic as well as the EU-wide effects resulting from infrastructure production and installation. Types of infrastructure covered by the model include electricity recharging points and CNG, LNG and H₂ refuelling points for road transport.

Calculating the Gross Value Added (GVA) through AFI build-up

Figure 2-1 shows a model flowchart for the calculation of the domestic economic effects of recharging point build-up in a Member State. For each infrastructure type and Member State, AFI build-up targets are derived in a first step, calculated as the target number of recharging or refuelling points minus present number as given in the NPF. Summed over Member States, the number of total planned AFI installations of each type in the EU results. For the different types of infrastructure, target years are given by the Directive. AFI build-up is assumed to be linear up to the target year (e.g., 2020 for recharging points), with no further growth assumed in later years.

Modelling Value Added and Employment Effects of AFI buildup
Example: Normal Power Recharging Points (RP) in Member State A

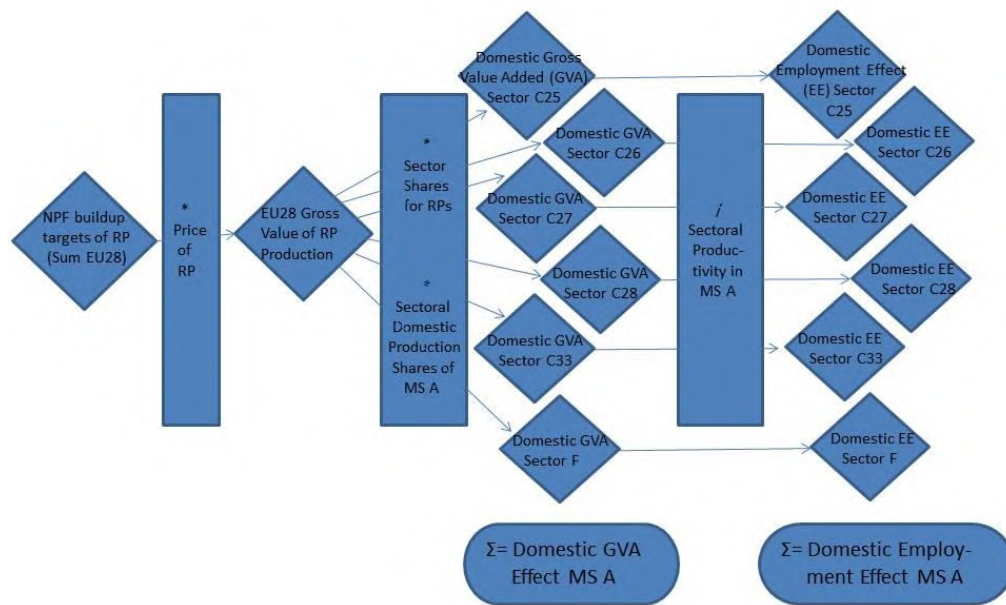


Figure 2-1: Flowchart of Added Value and Employment Calculation

Annual numbers of new AFI installed are multiplied by their net market prices to derive the Gross Value of Production (GVP). As the market price of a technology includes all value added along the value chain, it is a reasonable proxy for the calculation of gross value of production added.

In a next step, the share of each Member State in the production and installation of AFI needs to be determined, and imports from outside the EU need to be deducted. As the share of imported preliminary products differs among economic sectors, the GVP is sub-split. This is done by assigning the different technological components of an AFI installation (and thus their costs) to different economic sectors, on the basis of data on the composition and prices of the different AFI types. Price information was taken from recent studies and industry sources¹⁴. AFI GVP is assigned to the following sectors (in line with Eurostat NACE Rev. 2):

Table 2-1: Economic Sectors Considered

Sector	Fabricated metal products, except machinery and equipment	Computer, electronic and optical products	Electrical equipment	Machinery and equipment n.e.c.	Repair and installation services of machinery and equipment	Constructions and construction works
Eurostat Sector Number	C25	C26	C27	C28	C33	F

¹⁴ Steer Davies Gleave (2016), Clean Power for Transport Infrastructure Deployment. Final Report, Study on behalf of European Commission, DGMOVE/2015 VIGIENo 495; Ludwig-Bölkow-Systemtechnik (2016), Vergleich von CNG und LNG zum Einsatz in Lkw im Fernverkehr, Abschlussbericht; Information from the German National Platform Electromobility (NPE) and e-mobil BW, Germany.

For each of these sectors, the sectoral GVP is multiplied by the sectoral domestic production share, yielding the sectoral domestic GVA for each of the six sectors for the AFI type and Member State under consideration. By default, the sectoral domestic share in AFI production in each Member State is assumed to be equal to the Member State's present sectoral share of production value within the EU, which is derived from Eurostat data¹⁵. The model allows reallocating domestic production shares as well as import shares from outside the EU for scenario analysis.

The national GVA effect resulting in the sectors C25, C26, C27 and C28 from the production is allocated completely (adjusted by preliminary imports) to the producing country. The costs of installing a recharging or refuelling point, occurring in sectors C33 and F, is divided into a GVA effect in the producing country and the country that installs the infrastructure.

Summing over the sectors, the Member States' domestic GVA effect from the particular infrastructure type results. For each Member State, total sectoral GVA effect includes the domestic effect of own AFI installation and the Member States exports of preliminary products for AFI installation to other EU countries. The sum over all AFI types per Member State is the total national GVA effect from the EU-wide implementation of AFI targets as envisaged in the NPFs, and the sum over all Member States yields the EU-wide effect. AFI maintenance costs are included via a multiplier representing annual costs as percentage of total investment per facility.

Calculating the employment effect of AFI build-up

As shown in Figure 2-1, the employment effect of building a given type of infrastructure in each Member State is derived from domestic GVA per sector, dividing it by productivity. This yields the amount of person-years required to build the AFI envisaged in the NPF, which is assumed to translate into employment.

As labour productivity varies for each Member State and sector, this calculation is done on sectoral level. Data on the number of persons employed in the production of AFI is not available, thus productivities in the sectors contributing to AFI build-up (see Table 2-1) were used. These were derived by dividing each Member State's sectoral gross value added by the number of employed persons, both taken from Eurostat¹⁶.

The domestic employment effect is derived by aggregating over all sectors, and the EU-wide effect by then aggregating over all Member States.

Sensitivities and scenario analysis

The model allows for running scenarios on a wide number of parameters. These include, for example:

- The allocation of AFI production and installation, intra-EU and international,
- Technology costs and sectoral shares,

¹⁵ Total imports and EU-internal imports for each Member State are available from Eurostat at http://appsso.eurostat.ec.europa.eu/nui/show.do?wai=true&dataset=nama_10_exi, input-output tables for all member states based on <http://ec.europa.eu/eurostat/de/web/esa-supply-use-input-tables/data/workbooks>.

¹⁶ Annual enterprise statistics for special aggregates, http://ec.europa.eu/eurostat/data/database_

- Technology types, e.g. normal vs. high power, number of points per recharging or refuelling point, etc.,
- The time frame of AFI build-up, and
- Labour productivity.

3 OVERVIEW OF TARGETS, OBJECTIVES AND LEVEL OF ATTAINMENT FROM ALL NPFs

This section provides an overview of the targets and objectives, the measure scores and comprehensiveness in the Member States' NPFs as well as the current level of attainment per Member State.

Figure 3-1 gives a high-level overview on the compliance of the NPFs with the requirements of the Directive.

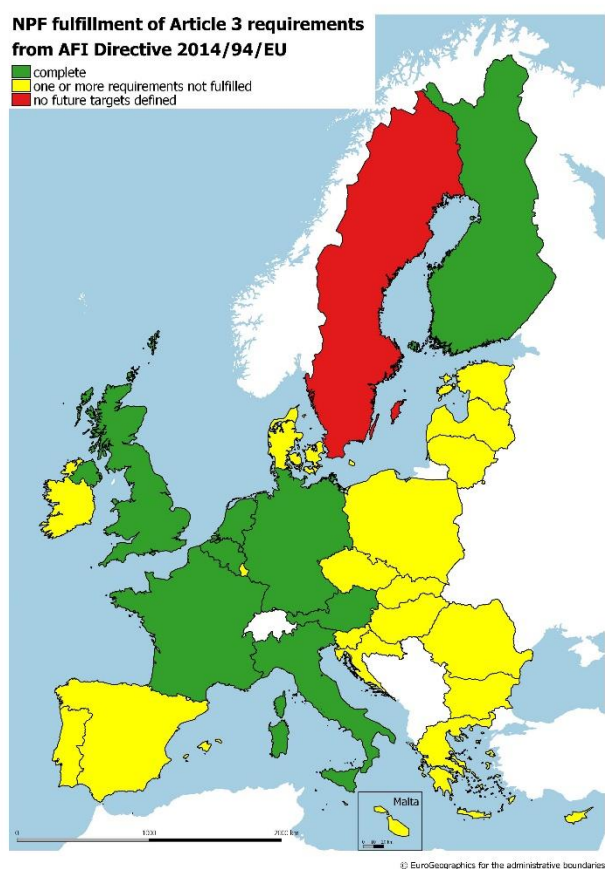


Figure 3-1: Compliance of NPFs with requirements of the Directive

Twenty Member States¹⁷ have not defined alternative fuels infrastructure targets for all mandatory fuels/modes or do not meet all requirements of Article 3 of the Directive.

From the analysis of the NPFs it becomes evident that they are not coherent at Union level. The NPFs are diverging when it comes to prioritising different alternative fuels. They feature very different ambition levels across Member States both in terms of projected future deployment of alternative fuels and their corresponding infrastructure. In general, the future estimates and targets are much lower than what was

¹⁷ Bulgaria, Cyprus, the Czech Republic, Denmark, Estonia, Greece, Spain, Croatia, Hungary, Ireland, Lithuania, Luxembourg, Latvia, Malta, Poland, Portugal, Romania, Sweden, Slovenia and Slovakia.

estimated in the Impact Assessment¹⁸ for the Directive. Even with low ambition, very few NPFs define sufficient corresponding targets for alternative fuels infrastructure. The adoption status and likely impact of support measures seems too low as to ensure that the national targets and objectives contained in the NPFs are reached. All this can lead to a market fragmentation at EU level and even within certain Member States.

Table 3-1 gives an overview of the infrastructure targets sufficiency and level of attainment. Two NPFs¹⁹ do not contain targets for publicly accessible recharging points, four²⁰ do not contain targets for CNG refuelling points, and seven²¹ do not contain targets for LNG refuelling points for heavy-duty vehicles along the road TEN-T Core Network. Six²² NPFs do not contain targets for LNG refuelling points at maritime ports and four²³ do not contain targets for LNG refuelling points at inland ports.

Table 3-1: Overview of infrastructure targets sufficiency and level of attainment²⁴

¹⁸ Commission Staff Working Document Impact Assessment accompanying the document Proposal for a Directive of the European Parliament and of the Council on the deployment of alternative fuels infrastructure, SWD/2013/05 final

¹⁹ Spain and Sweden.

²⁰ Bulgaria, Cyprus, Malta and Sweden.

²¹ Cyprus, Denmark, Ireland, Latvia, Malta, Romania and Sweden.

²² Cyprus, Denmark, Ireland, Latvia, Malta and Sweden.

²³ The Czech Republic, Luxembourg, Portugal, and Sweden.

²⁴ Level of attainment is expressed as current status divided by future target (in %).

Infrastructure targets	AF Infrastructure for fuel / mode	Electricity for vehicles (2020)	Recharging points, TEN-T network (2025)	Electricity for ships (2025)	Electricity for stationary airplanes	CNG for vehicles (2020)	CNG refuelling points, TEN-T network (2025)	LNG for heavy duty vehicles (2025)	LNG for maritime ports (2025)	LNG for inland ports (2030)	H2 for vehicles (2025)	Other fuels (LPG) / modes	AF for railway
AT	sufficiency	i	(OK)	(OK)	(OK)	OK	(OK)	(OK)	NA	(OK)	OK	-	(OK)
	target attainment (in %)	71-52.9	-	-	100	100	100	0	NA	0	60	-	-
BE	sufficiency	i	(OK)	OK	(OK)	OK	(OK)	(OK)	OK	(OK)	OK	-	-
	target attainment (in %)	20.6	-	81.8	100	17.4	-	14.3	~75	0	13.6	-	-
BG	sufficiency	i	X	(OK)	(OK)	X	X	i	(OK)	(OK)	OK	X	X
	target attainment (in %)	0.9	-	-	-	-	-	25 ^c	0	50	0	-	-
CY	sufficiency	(OK)	OK	X	(OK)	X	X	X	X	NA	X	(OK)	X
	target attainment (in %)	36	-	-	-	-	-	-	-	NA	-	-	-
CZ	sufficiency	i	(OK)	(OK)	(OK)	OK	OK	OK	NA	X	OK	X	X
	target attainment (in %)	34.7	-	-	-	54	-	0	NA	-	33.3 - 20.0	-	-
DE	sufficiency	i	(OK)	X	X	(OK) ^a	(OK)	OK	(OK)	(OK)	OK ^b	X	(OK)
	target attainment (in %)	42	-	-	-	100 ^a	-	-	-	-	50	-	-
DK	sufficiency	OK	(OK)	X	(OK)	(OK)	i	X	(OK)	NA	X	X	(OK)
	target attainment (in %)	84.7	-	-	X	65	-	-	-	NA	-	-	-
EE	sufficiency	(OK)	(OK)	(OK)	(OK)	OK	OK	(OK)	(OK)	NA	(OK)	(OK)	(OK)
	target attainment (in %)	100	-	-	100	37.5	100	0	0	NA	0	-	-
EL	sufficiency	OK	X	OK	X	i	(OK)	i	(OK)	NA	X	OK	X
	target attainment (in %)	4.7	-	28.6	-	50	-	0	0	NA	-	73.7	-
ES	sufficiency	X	OK	(OK)	OK	OK	(OK)	OK	OK	(OK)	OK	OK	(OK)
	target attainment (in %)	-	-	14.3	90	59.2	-	43.2	100	-	20	46.8	-
FI	sufficiency	i	OK	OK	OK	OK	(OK)	OK	OK	(OK)	(OK)	X	X
	target attainment (in %)	48.6	-	100	-	43.6	-	18.2	-	-	-	-	-
FR	sufficiency	i	(OK)	(OK)	(OK)	OK (NGV)	(OK)	OK	OK	OK	OK	(OK)	(OK)
	target attainment (in %)	45.9	-	-	-	54.4	-	4	14.3	0	36.7	-	-
HR	sufficiency	(OK)	(OK)	OK	OK	(OK)	(OK)	i	(OK)	OK	i	OK	X
	target attainment (in %)	76.4	-	50	100	15.4	-	0	0	0	0	-	-
HU	sufficiency	OK	(OK)	OK	i	(OK)	OK	OK	NA	OK	(OK)	(OK)	X
	target attainment (in %)	10.1-2.4	-	78	-	27.6-13.6	-	0	NA	0	0	-	-
IE	sufficiency	i	(OK)	X	X	OK	(OK)	X	X	NA	X	X	X
	target attainment (in %)	87.6	-	-	-	7.7	-	-	-	NA	-	-	-
IT	sufficiency	OK	(OK)	(OK)	(OK)	i	(OK)	i	OK	OK	OK	OK	X
	target attainment (in %)	16.2-3.9	-	-	-	81.6	-	13.8	0	0	12.2	-	-
LT	sufficiency	i	X	X	(OK)	(OK)	(OK)	(OK)	(OK)	(OK)	X	(OK)	X
	target attainment (in %)	26	-	-	-	30	-	0	100	0	-	-	-
LU	sufficiency	i	OK	(OK)	OK	OK	(OK)	OK	NA	X	X	X	X
	target attainment (in %)	8.8	-	-	85.7	350	-	0	NA	-	-	-	-
LV	sufficiency	OK	OK	X	(OK)	OK	X	X	X	NA	X	X	(OK)
	target attainment (in %)	48	-	-	-	40	-	-	-	NA	-	-	-
MT	sufficiency	OK	OK	X	X	X	X	X	X	NA	X	X	NA
	target attainment (in %)	16.4	-	-	-	-	-	-	-	NA	-	-	NA
NL	sufficiency	OK	OK	OK	(OK)	OK	(OK)	OK	(OK)	(OK)	(OK)	X	(OK)
	target attainment (in %)	58.3	-	60-70	-	100	100	68	50	38	10	-	0
PL	sufficiency	i	(OK)	(OK)	X	OK	(OK)	OK	OK	(OK)	X	OK	X
	target attainment (in %)	4.7	-	-	-	37.5	-	21.4	25	-	-	-	-
PT	sufficiency	OK	(OK)	X	X	OK	i	i	(OK)	X	X	OK	(OK)
	target attainment (in %)	47	-	-	-	75	-	36	20	-	-	88	-
RO	sufficiency	i	i	(OK)	X	(OK)	(OK)	X	(OK)	(OK)	X	X	X
	target attainment (in %)	21.6	-	-	-	3.6	6.7	-	0	0	-	-	-
SE	sufficiency	X	X	X	(OK)	X	X	X	X	X	X	X	OK
	target attainment (in %)	-	-	-	-	-	-	-	-	-	-	-	-
SI	sufficiency	OK	(OK)	X	(OK)	OK	(OK)	(OK)	(OK)	NA	OK	X	X
	target attainment (in %)	40.3	-	-	-	28.6	-	0	0	NA	14.3	-	-
SK	sufficiency	i	(OK)	(OK)	(OK)	OK	(OK)	OK	NA	OK	X	X	X
	target attainment (in %)	58.7	-	-	-	37.5	-	0	NA	0	-	-	-
UK	sufficiency	i	(OK)	(OK)	(OK)	(OK)	(OK)	(OK)	(OK)	NA	OK	X	X
	target attainment (in %)	73.3	-	-	-	63.6	-	55	45	NA	23.1	-	-

Legend for sufficiency assessment	target definition asked by the Directive
	consideration asked by the Directive
	OK sufficient
	(OK) seems sufficient (not all information provided)
	i insufficient
	X nothing defined/considered
	NA not applicable

^a Requirements fulfilled presently, no further AFI build-up planned

^b TEN-T core coverage is already ensured by the 2020 target

^c 2030

Table 3-2 provides an overview of vehicle/vessel future estimates and the current status of attainment.

Table 3-2: Overview of vehicle/vessel future estimates and current status

Vehicle, vessel estimates	Fuel / mode	Electric vehicles (2020)	CNG vehicles (2020)	LNG heavy duty vehicles (2025)	H2 vehicles (2025)	Other AF vehicles (LPG - 2020)	LNG seagoing ships (2025)	LNG inland waterway vessels (2030)
AT	future share (in %)	1.25 - 3.42	-	-	-	-	NA	-
	estimate reached (in %)	20.8 - 7.6	-	-	-	-	NA	-
BE	future share (in %)	1.30	0.62	-	-	-	-	-
	estimate reached (in %)	24.4	10.1	-	-	-	-	-
BG	future share (in %)	1.08	-	-	0.01	-	-	-
	estimate reached (in %)	0.2	-	-	0	-	-	-
CY	future share (in %)	0.02 - 0.32	-	-	-	-	-	NA
	estimate reached (in %)	75 - 3.7	-	-	-	-	-	NA
CZ	future share (in %)	0.35	1.03	0.23	-	-	NA	-
	estimate reached (in %)	8.2	20.5	0	-	-	NA	-
DE	future share (in %)	2.14	-	-	-	-	-	-
	estimate reached (in %)	8.8	-	-	-	-	-	-
DK	future share (in %)	0.94	-	-	-	-	-	NA
	estimate reached (in %)	33.4	-	-	-	-	-	NA
EE	future share (in %)	-	-	-	-	-	-	NA
	estimate reached (in %)	-	-	-	-	-	-	NA
EL	future share (in %)	0.06	0.23	0.06	-	4.52	-	NA
	estimate reached (in %)	5.34	14.36	0	-	99.5	-	NA
ES	future share (in %)	0.14-0.54	0.06	0.09	<0.01	0.72 - 0.90	-	-
	estimate reached (in %)	33.9-8.6	17.0	31.3	2.2	25 - 20	-	-
FI	future share (in %)	0.63	0.17	-	-	-	-	-
	estimate reached (in %)	15.6	23.2	-	-	-	-	-
FR	future share (in %)	2.19	-	-	-	-	-	-
	estimate reached (in %)	12.4	-	-	-	-	-	-
HR	future share (in %)	-	-	-	-	-	-	-
	estimate reached (in %)	-	-	-	-	-	-	-
HU	future share (in %)	0.56	1.06	4.38	<0.01	0.58	-	-
	estimate reached (in %)	3.7	13.8	0	0.0	113.1	-	-
IE	future share (in %)	1.00	0.17	-	-	0.14	-	-
	estimate reached (in %)	8.7	0.2	-	-	83.3	-	-
IT	future share (in %)	0.11 - 0.32	3.27	-	0.06	5.82	-	-
	estimate reached (in %)	25.9 - 9.0	78.3	-	<0.1	89.0	0.0	0.0
LT	future share (in %)	0.07	-	-	-	-	-	-
	estimate reached (in %)	12.9	-	-	-	-	-	-
LU	future share (in %)	9.22	0.05	0.16 / 0.79	-	-	NA	-
	estimate reached (in %)	3.8	117.0	-	-	-	NA	-
LV	future share (in %)	0.1	-	-	-	-	-	NA
	estimate reached (in %)	40.6	-	-	-	-	-	NA
MT	future share (in %)	1.69	-	-	-	-	-	NA
	estimate reached (in %)	2.32	-	-	-	-	-	NA
NL	future share (in %)	1.47	-	-	0.02	-	-	-
	estimate reached (in %)	82.5	-	-	1.5	-	-	12.5
PL	future share (in %)	0.32	0.04	0.01	-	-	-	-
	estimate reached (in %)	1.3	18.0	1.9	-	-	-	-
PT	future share (in %)	0.23	-	0.11	-	-	-	-
	estimate reached (in %)	16.1	-	0	-	-	-	-
RO	future share (in %)	-	-	-	-	-	-	-
	estimate reached (in %)	-	-	-	-	-	-	-
SE	future share (in %)	-	-	-	-	-	-	-
	estimate reached (in %)	-	-	-	-	-	-	-
SI	future share (in %)	0.95	0.24	4.14	0.10	2.66	-	NA
	estimate reached (in %)	6.7	5.9	0.4	0.5	26.5	-	NA
SK	future share (in %)	0.49	0.24	-	-	-	NA	-
	estimate reached (in %)	5.9	16.4	-	-	-	NA	-
UK	future share (in %)	1.02 - 1.11	-	-	-	-	-	NA
	estimate reached (in %)	22.7 - 20.9	-	-	-	-	-	NA

Table 3-3 gives an overview of the measure scores and their comprehensiveness.²⁵

Table 3-3: Overview of measure scores and comprehensiveness

²⁵ Future estimate expressed as share of AFV per total (current) stock; "estimate reached" expressed as current number of AFV divided by future estimate (both in %).

Measure assessment results	AF Infrastructure for fuel / mode	Electricity for vehicles	Electricity for ships	Electricity for stationary airplanes	CNG for vehicles	LNG for heavy duty vehicles	LNG at maritime ports (2025)	LNG at inland ports (2030)	H2 for vehicles	Other fuels / modes	bicycles	Measures for AFI in public transport	Measures for non-public recharge
AT	score	M	X	X	M	X	NA	X	L	X	M	M	M
	comprehensiveness	c	-	-	n	-	NA	-	n	-	c	c	n
BE	score	M	L	X	M	L	M	L	L	X	M	M	M
	comprehensiveness	c	n	-	n	n	n	n	c	-	n	c	c
BG	score	L	X	X	M	M	X	X	X	X	X	M	L
	comprehensiveness	c	-	-	n	n	-	-	-	-	-	c	n
CY	score	M	X	X	X	X	X	NA	X	X	X	X	L
	comprehensiveness	c	-	-	-	-	-	NA	-	-	-	-	n
CZ	score	L	X	X	M	M	NA	X	L	L	X	L	L
	comprehensiveness	c	-	-	n	n	NA	-	n	n	-	n	n
DE	score	M	L	X	L	M	L	L	H	L	X	L	L
	comprehensiveness	c	n	-	c	c	n	n	c	n	-	c	n
DK	score	M	L	X	M	X	X	NA	X	M	X	M	X
	comprehensiveness	c	n	-	n	-	-	NA	-	n	-	n	-
EE	score	X	X	X	M	X	X	NA	L	X	X	L	X
	comprehensiveness	-	-	-	c	-	-	NA	n	-	-	c	-
EL	score	M	L	X	M	M	M	NA	X	L	X	M	L
	comprehensiveness	c	n	-	c	n	c	NA	-	n	-	c	n
ES	score	M	L	X	M	M	M	X	M	M	M	M	H
	comprehensiveness	c	n	-	c	c	c	-	c	c	c	n	c
FI	score	M	L	L	M	M	H	L	L	X	X	M	X
	comprehensiveness	c	c	c	c	n	n	c	n	-	-	c	-
FR	score	H	L	L	M	M	L	L	M	M	X	M	H
	comprehensiveness	c	n	n	c	c	n	n	c	-	-	c	c
HR	score	L	X	X	L	L	X	X	X	X	L	L	X
	comprehensiveness	c	-	-	n	n	-	-	-	-	c	n	-
HU	score	M	X	X	H	M	NA	X	X	X	X	M	X
	comprehensiveness	c	-	-	n	n	NA	-	-	-	-	n	-
IE	score	M	L	L	M	L	L	NA	L	M	X	M	M
	comprehensiveness	c	c	n	c	n	n	NA	c	n	-	c	c
IT	score	M	X	X	M	M	X	X	M	M	X	M	M
	comprehensiveness	c	-	-	c	c	-	-	c	c	-	c	c
LT	score	L	X	X	L	X	X	X	X	X	X	X	X
	comprehensiveness	n	-	-	n	-	-	-	-	-	-	-	-
LU	score	H	X	X	L	X	NA	X	M	X	M	M	X
	comprehensiveness	c	-	-	n	-	NA	-	n	-	n	n	-
LV	score	M	X	X	M	L	X	NA	X	L	X	M	L
	comprehensiveness	c	-	-	n	n	-	NA	-	n	-	n	n
MT	score	M	X	X	X	X	X	NA	X	L	M	M	X
	comprehensiveness	c	-	-	-	-	-	NA	-	n	c	c	-
NL	score	H	M	H	X	M	M	M	M	X	X	M	M
	comprehensiveness	c	c	n	-	n	c	c	c	-	-	c	n
PL	score	L	L	X	L	L	L	X	X	X	X	L	X
	comprehensiveness	c	c	-	c	n	c	-	-	-	-	c	-
PT	score	M	X	X	M	L	M	X	X	X	X	M	L
	comprehensiveness	c	-	-	n	n	n	-	-	-	-	n	n
RO	score	M	X	L	L	L	X	X	L	L	X	M	L
	comprehensiveness	c	-	n	c	c	-	-	c	c	-	n	n
SE	score	M	M	X	M	X	X	X	L	M	X	L	X
	comprehensiveness	c	c	-	c	-	-	-	n	c	-	c	-
SI	score	M	L	X	L	L	X	NA	L	NA	X	L	L
	comprehensiveness	c	n	-	c	n	-	NA	n	NA	-	n	n
SK	score	M	L	X	L	L	NA	L	X	X	X	L	X
	comprehensiveness	c	n	-	n	n	NA	n	-	-	-	n	-
UK	score	H	X	X	L	L	X	NA	M	L	X	H	H
	comprehensiveness	c	-	-	n	n	-	NA	c	n	-	c	c

Legend	measure required (to support targets)	
	measure desirable for infrastructure consideration	
Legend for measure score	X	nothing assessable defined
	low (L)	
	medium (M)	
	high (H)	
Legend for measure comprehensiveness	n	not comprehensive
	c	comprehensive
	NA	not applicable

4 OVERALL CONTRIBUTION OF NPFs TO EU POLICY TARGETS

This section describes the results of the analysis for important EU policy targets. It covers the aspects that are directly targeted by the scope of the Directive (alternative fuels infrastructure and vehicles/vessels) as well as other targets to which the Directive contributes as one initiative among other policies in place.

Ensuring the build-up of a minimum alternative fuels infrastructure in the EU

Recharging points

Figure 4-1 summarises the information for the targeted publicly accessible recharging points and electric vehicle (EV) estimates per NPF as well as the current attainment level. Almost all NPFs define targets for publicly accessible recharging points. However, only ten NPFs (Cyprus, Denmark, Greece, Hungary, Italy, Latvia, Malta, the Netherlands, Portugal and Slovenia) define a target that would ensure at least one publicly accessible recharging point per 10 electric vehicles for 2020. For the Member States that provide future EV estimates, the ratio of electric vehicles per publicly accessible recharging point ranges from 5 (in Latvia) to 32 (in the United Kingdom). The planned targets, which are not precisely defined in some cases, are significantly lower than the proposed targets in the Impact Assessment²⁶ of the Directive. The current attainment level for the 2020 targets of publicly accessible recharging points, calculated as the ratio between current and targeted recharging points ranges from 1% to 100%.

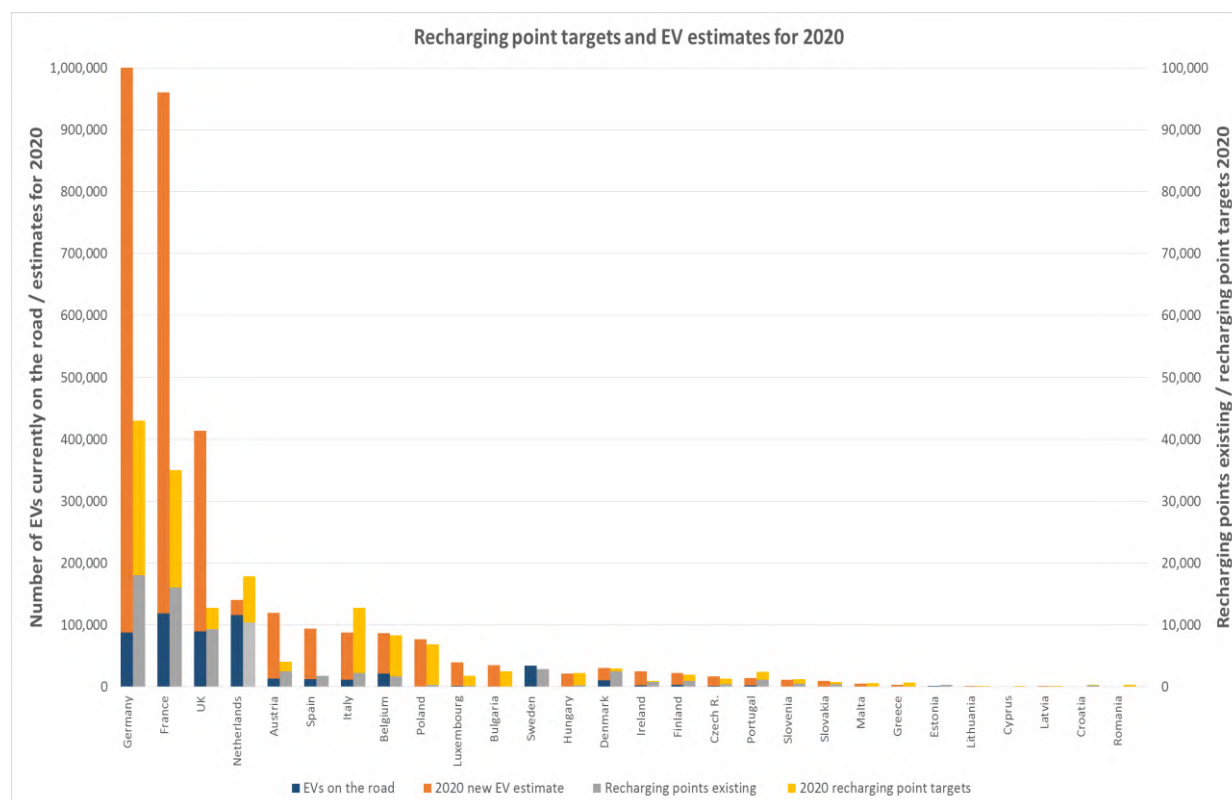


Figure 4-1: NPFs' 2020 recharging point targets and EV estimates, level of attainment²⁷

The maps in Figure 4-2 show how the ratio of publicly accessible recharging points per EV will deteriorate in almost all Member States from today until 2020, when the targets for recharging points and EV estimates will materialise.

²⁶ Commission Staff Working Document Impact Assessment accompanying the document Proposal for a Directive of the European Parliament and of the Council on the deployment of alternative fuels infrastructure, SWD/2013/05 final

²⁷ Member states ordered by their estimated number of EV for 2020 (from high to low). When the right column (recharging points) is at least as high as the left column (EVs), the ratio of publicly accessible recharging points per EV is at least one to ten.

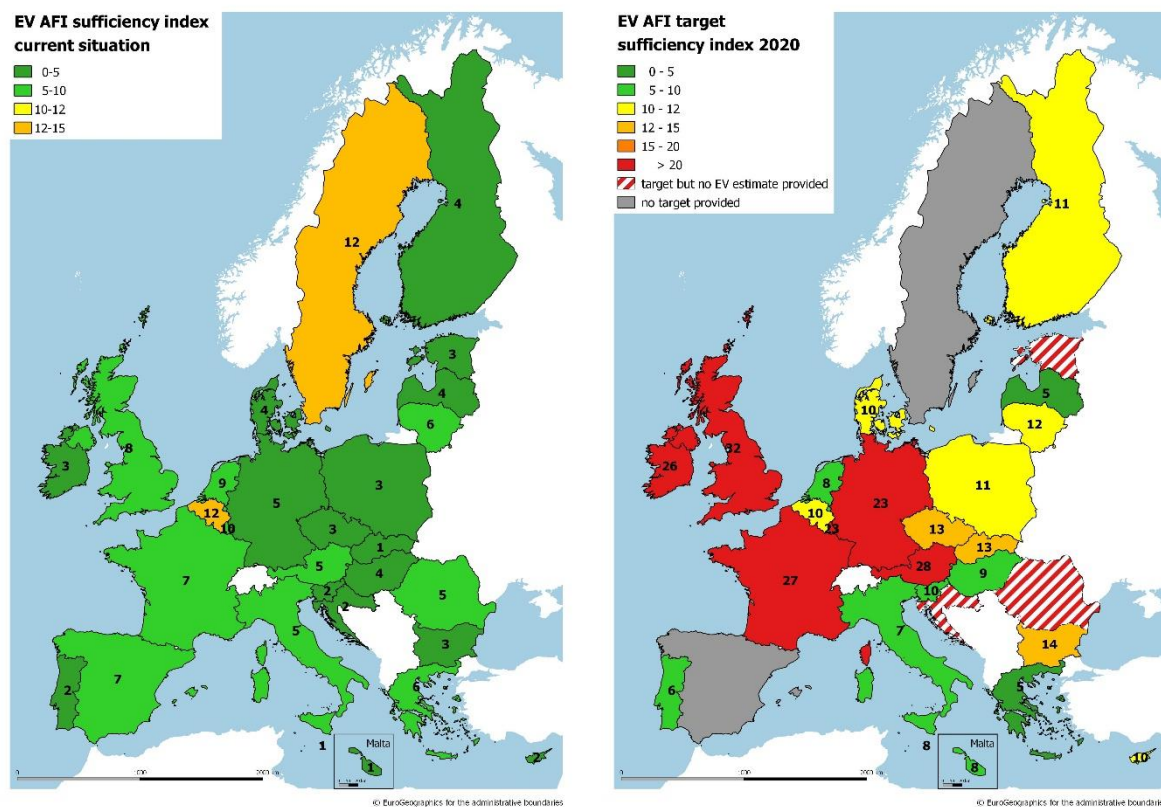


Figure 4-2: Overview of recharging point sufficiency index per Member State, current (left) and 2020 (right)

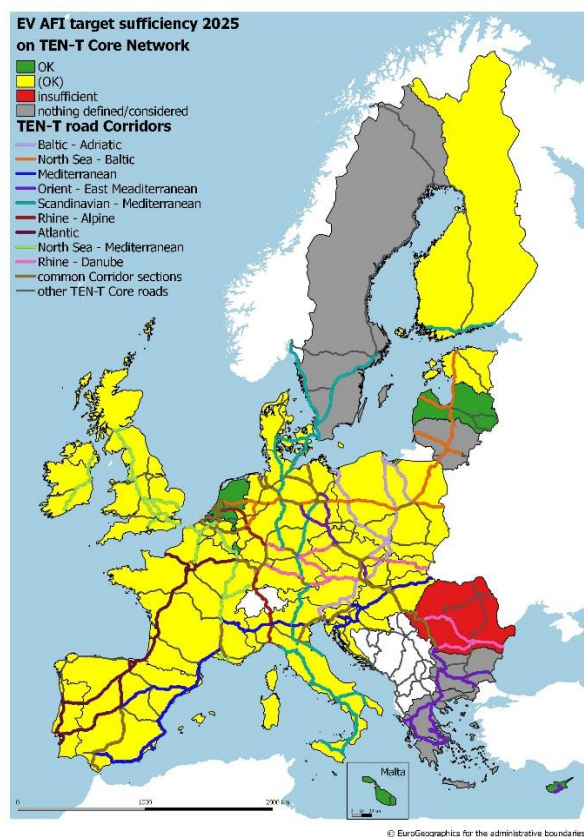


Figure 4-3: Overview of recharging point sufficiency to ensure appropriate coverage of the TEN-T Core Network by 2025

Coverage of the TEN-T network seems to be progressing well, the distance targets being usually met. Some portions of the road TEN-T Core Network will remain without appropriate recharging infrastructure, according to the NPFs. The map in Figure 4-3 shows the assessment results for TEN-T Core Network coverage with recharging points by 2025.

From the analysis of the NPFs recharging point targets, it becomes evident that they are not coherent at Union level. The NPFs are diverging in their ambition levels vis-à-vis the deployment of recharging points accessible to the public. Table 4-1 shows the normalised difference index for the density of recharging point targets using the total road network of an MS. The table reveals big differences between neighbouring Member States regarding their density of recharging point targets. If the normalised difference index is also interpreted as an indicator for cross-border continuity in the sense that the level of infrastructure density varies a lot across borders, the following cross-border continuity issues can be identified between Member States that are neighbours or have major ferry connections: Belgium/France, Bulgaria/Greece, Bulgaria/Romania, the Czech Republic/Germany, Germany/the Netherlands, Germany/Sweden, Spain/France, Spain/Portugal, France/Luxembourg, Croatia/Slovenia, Hungary/Romania, Lithuania/Poland, Lithuania/Sweden, and the Netherlands/the UK.

Table 4-1: Normalised difference index for recharging point targets (2020)²⁸

	AT	BE	BG	CY	CZ	DE	DK	EE	EL	ES	FI	FR	HR	HU	IE	IT	LT	LU	LV	MT	NL	PL	PT	RO	SE	SI	SK	UK
AT					0.67	0.26								0.24		0.25										0.21	0.47	
BE						0.44						0.71						0.09			0.46							0.55
BG									0.90														0.97					
CY																												
CZ	0.67					0.79															0.26						0.28	
DE	0.26	0.44			0.79		0.66					0.38						0.51			0.75	0.67			0.74			
DK						0.66																		0.17				
EE											0.52							0.05										
EL			0.90													0.61												
ES												0.78											0.88					
FI								0.52																0.44				
FR		0.71				0.38			0.78							0.11		0.75										0.26
HR														0.62		0.62									0.83			
HU	0.24																							0.86	0.43	0.26		
IE																											0.45	
IT	0.25								0.61			0.11	0.62							0.56						0.44		
LT																			0.64			0.79			0.72			
LU		0.09				0.51						0.75																
LV							0.05																					
MT																0.56												
NL		0.46				0.75																						0.81
PL					0.26	0.67																					0.03	
PT									0.88																			
RO			0.96										0.86															
SE						0.74	0.17				0.44						0.72											
SI	0.21												0.83	0.43		0.44												
SK	0.47				0.28									0.26								0.03						
UK		0.55										0.26			0.45						0.81							

Electricity for stationary airplanes and shore-side electricity

Shore-side electricity and electricity supply for stationary airplanes are scarcely covered in the various NPFs and very few NPF contain any targets or measures for an increase of these alternative fuel sources.

²⁸ Only for member states with a joint border or major ferry connections between one another. "0" means maximum coherence of targets, "1" means minimum coherence of targets.

CNG refuelling points

Some NPFs (Germany, Luxembourg, and the Netherlands) express a pessimistic view on the viability of CNG for road, while others (Belgium, the Czech Republic, Hungary, and Italy) consider this as a priority. Several Member States, especially the ones that currently have a rather high number of CNG refuelling points in comparison to CNG vehicles on the road, state that they have no plans to support a further increase of CNG refuelling infrastructure. The 2020 planned ratio of CNG vehicles to refuelling points ranges from 1,000 to 100, the target attainment level as of today, calculated by dividing the number of currently available CNG refuelling points by future targets, varies between 3.6% and 100%. Figure 4-4 provides an overview of the 2020 targeted CNG refuelling points accessible to the public and CNG vehicle estimates per NPF as well as the current level of target achievement.

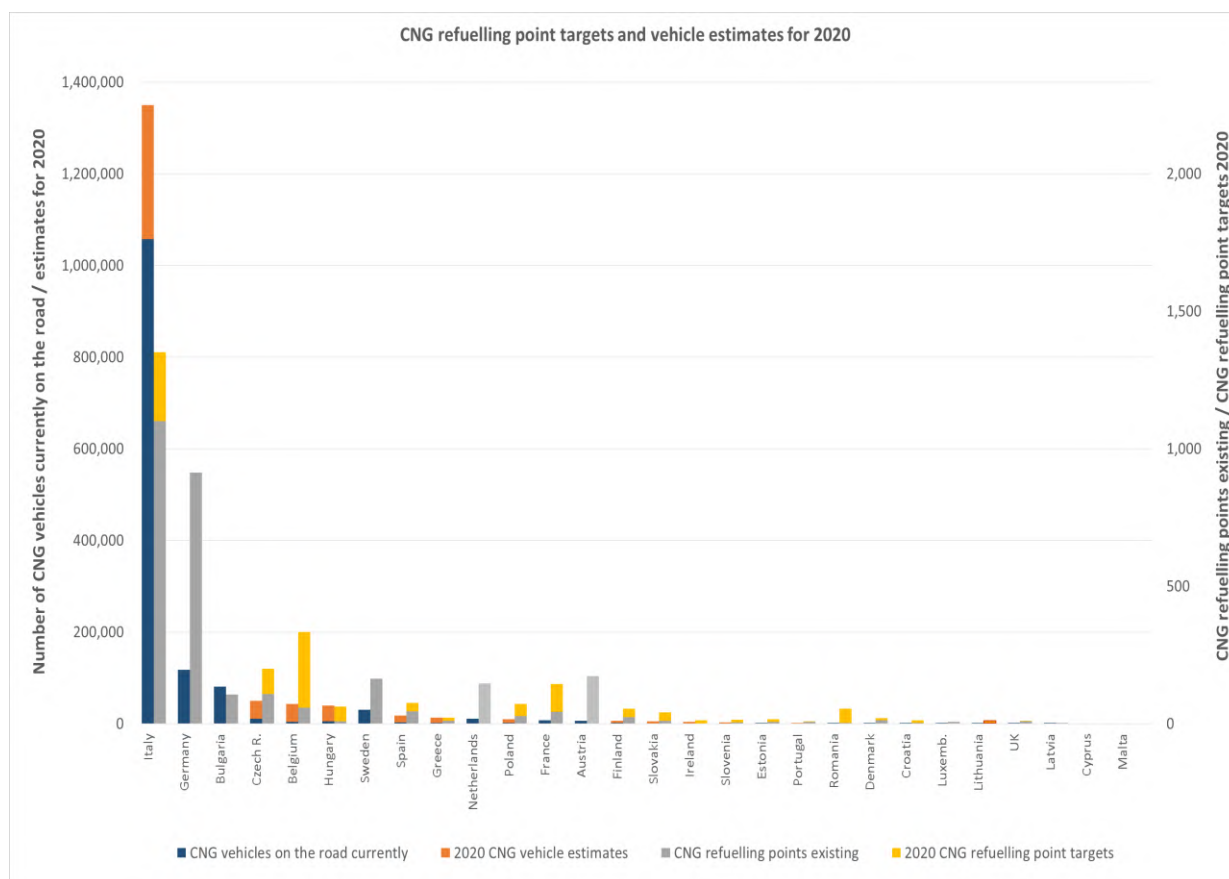


Figure 4-4: NPFs' 2020 CNG refuelling point targets and CNG vehicle estimates, level of attainment²⁹

The maps in Figure 4-5 show the sufficiency index for the current situation and for the 2020 targeted CNG refuelling infrastructure accessible to the public. A ratio of at least one publicly accessible CNG refuelling point per 600 CNG vehicles in a given Member State is considered sufficient. 16 Member States (Austria, Bulgaria, Cyprus, Germany, Denmark, Estonia, France, Croatia, Lithuania, Latvia, Malta, the Netherlands, Portugal, Romania, Sweden, and the UK) did not provide any CNG vehicle estimates for the future. For these, the sufficiency index could not be calculated. Out of these 16 Member States, four (Bulgaria, Cyprus, Malta and Sweden) did not provide any targets for CNG refuelling points accessible to the public.

²⁹ Member states ordered by their estimated number of CNG vehicles for 2020 (from high to low). When the right column (refuelling points) is at least as high as the left column (CNG vehicles), the ratio of publicly accessible refuelling points per CNG vehicle is at least one to 600.

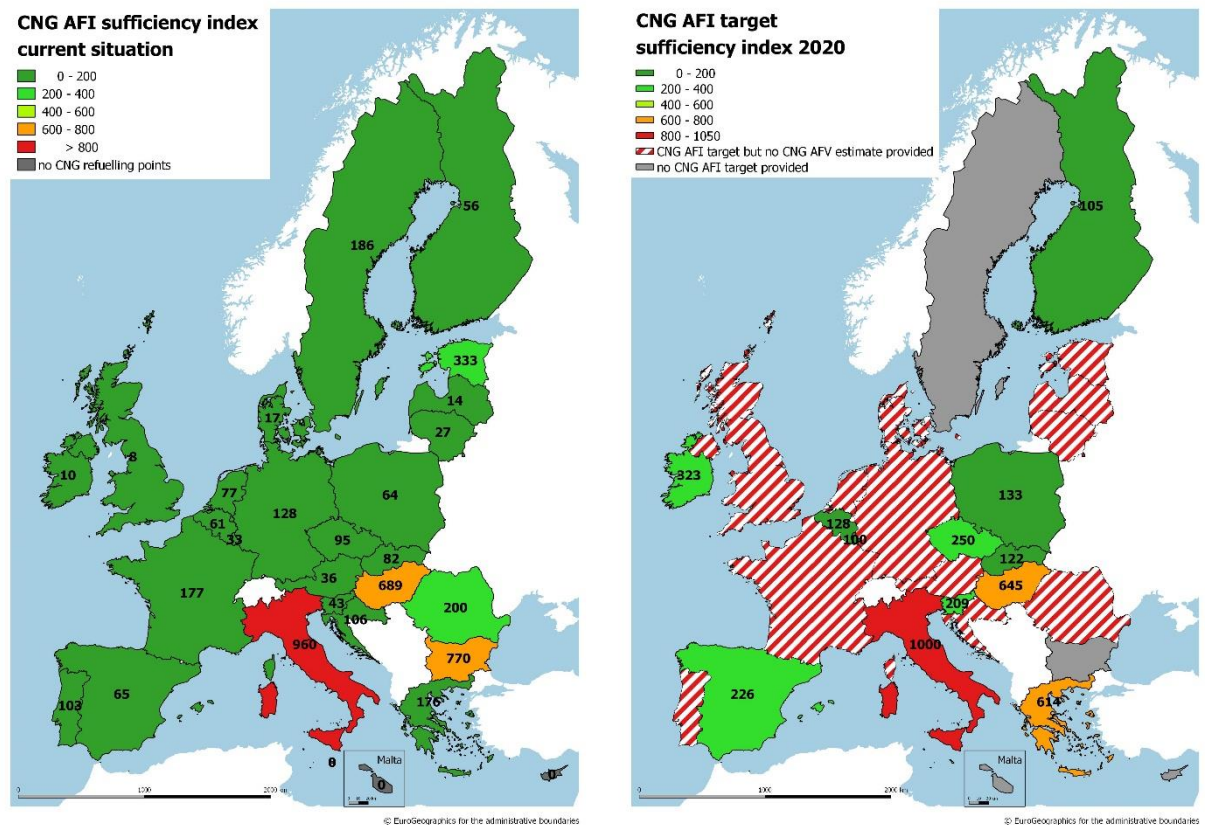


Figure 4-5: Overview of CNG refuelling point sufficiency index per Member State, current (left) and 2020 (right).

Table 4-2 shows the normalised difference index for the density of CNG refuelling point targets using the total road network of a Member State. The table reveals big differences between neighbouring Member States regarding their density of CNG refuelling point targets. If the normalised difference index is also interpreted as an indicator for cross-border continuity in the sense that the level of infrastructure density varies a lot across borders, the following cross-border continuity issues can be identified between Member States that are neighbours or have major ferry connections: Belgium/France, Belgium/Luxembourg, Belgium/the UK, Bulgaria/Greece, Bulgaria/Romania, the Czech Republic/Poland, Germany/Denmark, Germany/France, Germany/Luxembourg, Germany/Poland, Denmark/Sweden, France/Italy, Croatia/Italy, Ireland/the UK, Italy/Malta and the Netherlands/the UK.

Table 4-2: Normalised difference index for CNG refuelling point targets (2020)³⁰.

	AT	BE	BG	CY	CZ	DE	DK	EE	EL	ES	FI	FR	HR	HU	IE	IT	LT	LU	LV	MT	NL	PL	PT	RO	SE	SI	SK	UK
AT					0.15	0.07								0.42		0.21										0.40	0.36	
BE						0.66						0.96						0.93			0.29							0.99
BG									0.93														0.86					
CY																												
CZ	0.15					0.08																0.79					0.22	
DE	0.07	0.66			0.08		0.88					0.84						0.72			0.45	0.82			0.43			
DK						0.88																		0.72				
EE											0.36								0.16									
EL			0.93																									
ES												0.12											0.10					
FI								0.36																	0.11			
FR		0.96				0.84				0.12						0.91		0.31										0.48
HR														0.45		0.82										0.48		
HU	0.42														0.45										0.31	0.03	0.08	
IE																										0.03	0.08	0.71
IT	0.21								0.87			0.91	0.82							1.00						0.56		
LT																			0.20			0.06			0.56			
LU		0.93				0.72						0.31																
LV								0.16										0.20										
MT																												
NL		0.29				0.45																						0.98
PL					0.79	0.82																					0.69	
PT										0.10																		
RO			0.86											0.31														
SE						0.43	0.72				0.11						0.56											
SI	0.40												0.48	0.03		0.56												
SK	0.36				0.22									0.08								0.69						
UK		0.99										0.48			0.71					0.98								

LNG refuelling points

LNG for heavy-duty vehicles is covered by 21 NPFs and initial steps to ensure adequate TEN-T coverage are taken. However, according to the NPFs, appropriate coverage of the road TEN-T Core Network with LNG refuelling points is not guaranteed. Several Member States mention the need of further technical developments of LNG heavy-duty vehicles (e.g. longer driving ranges). Moreover, several Member States plan to review their LNG refuelling infrastructure targets after performing further market and cost-benefit analyses.

According to the NPF, a total of 384 LNG refuelling points will be deployed across EU. The map in Figure 4-6 shows the results of the assessment for the sufficiency of LNG refuelling points along the road TEN-T Core Network. The picture is very much dominated by the lack of or insufficient³¹ LNG refuelling point targets for heavy-duty trucks in Bulgaria, Cyprus, Denmark, Croatia, Ireland, Italy, Latvia, Malta, Portugal, Romania and Sweden. This leads to insufficient coverage of the road TEN-T network crossing these Member States and consequently cross-border issues with all their neighbouring Member States.

Table 4-3 shows the normalised difference index for the density of LNG refuelling point targets using the road TEN-T Core Network of a Member State. The table reveals big differences between neighbouring Member States regarding their density of LNG refuelling point targets along the road TEN-T Core Network. If the normalised difference index is also interpreted as an indicator for cross-border continuity in the sense that the level of infrastructure density varies a lot across borders, the following cross-border continuity issues can be identified between Member States that are neighbours or have major ferry connections: Austria/Hungary, Austria/Italy, Belgium/Germany, Bulgaria/Romania, Germany/Denmark, Germany/Luxembourg, Germany/the Netherlands, Denmark/Sweden, Greece/Italy, Estonia/Latvia,

³⁰ Only for member states with a joint border or major ferry connections between one another. "0" means maximum coherence of targets, "1" means minimum coherence of targets.

³¹ In view of guaranteeing a maximum distance of at least 400 km between LNG refuelling points along the TEN-T Core Network.

Croatia/Hungary, Croatia/Italy, Hungary/Romania, Hungary/Slovenia, Hungary/Slovakia, Ireland/the UK, Italy/Malta and Latvia/Lithuania.

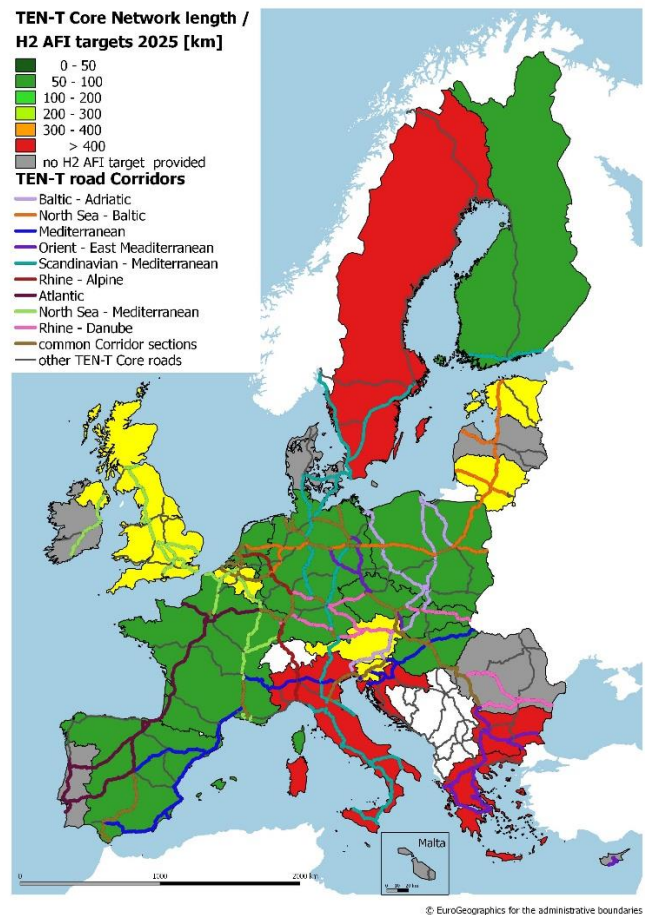


Figure 4-6: Results of the assessment for the target sufficiency of LNG refuelling points along the road TEN-T Core Network in 2025.

Table 4-3: Normalised difference index for LNG refuelling point targets along the road TEN-T Core Network (2025)³².

³² Only for member states with a joint border or major ferry connections between one another. “0” means maximum coherence of targets, “1” means minimum coherence of targets.

	AT	BE	BG	CY	CZ	DE	DK	EE	EL	ES	FI	FR	HR	HU	IE	IT	LT	LU	LV	MT	NL	PL	PT	RO	SE	SI	SK	UK
AT					0.45	0.13								0.95		0.83										0.57	0.13	
BE						0.74						0.21						0.20			0.62							0.10
BG									0.41															1.00				
CY																												
CZ	0.45					0.55																0.15					0.34	
DE	0.13	0.74			0.55		1.00					0.63						0.82		0.93	0.44							
DK						1.00																			1.00			
EE											0.66								1.00									
EL			0.41													0.89												
ES												0.10											0.22					
FI								0.66																	0.68			
FR		0.21				0.63				0.10						0.51		0.39										0.31
HR														0.95		0.83										0.58		
HU	0.95												0.95											1.00		0.84	0.94	
IE																												1.00
IT	0.83								0.89			0.51	0.83							1.00						0.48		
LT																			1.00									
LU		0.20				0.82						0.39																
LV							1.00																					
MT																1.00												
NL		0.62				0.93																						0.56
PL					0.15	0.44																					0.21	
PT										0.22																		
RO			1.00											1.00														
SE							1.00					0.68																
SI	0.57												0.58	0.84		0.48												
SK	0.13				0.34									0.94									0.21					
UK		0.10										0.31			1.00						0.56							

Based on the targets provided in the NPFs, it is evident that some portions of the road TEN-T Core Network will remain without LNG refuelling infrastructure. In particular, attention should be paid to the Southern part of the Atlantic Corridor and LNG cross-border continuity Spain/Portugal, the Southern part of the Scandinavian Mediterranean Corridor, the central and Eastern part of the Mediterranean Corridor, the Eastern part of the Rhine-Danube Corridor, the entire Orient-East-Mediterranean Corridor, and the Baltic part of the North-Sea Baltic Corridor.

The maps in Figure 4-7 show the results of the assessment for the sufficiency of LNG refuelling points in TEN-T Core Network maritime ports (left map) and LNG refuelling points in TEN-T Core Network inland ports (right map). The plans to deploy LNG in maritime and inland ports vary between high ambition (Finland, Hungary, and Italy) and no consideration, leaving a number of ports without any solution for LNG refuelling. For most of the inland waterway corridors the coverage of LNG refuelling will likely be inadequate according to the targets of the NPFs.

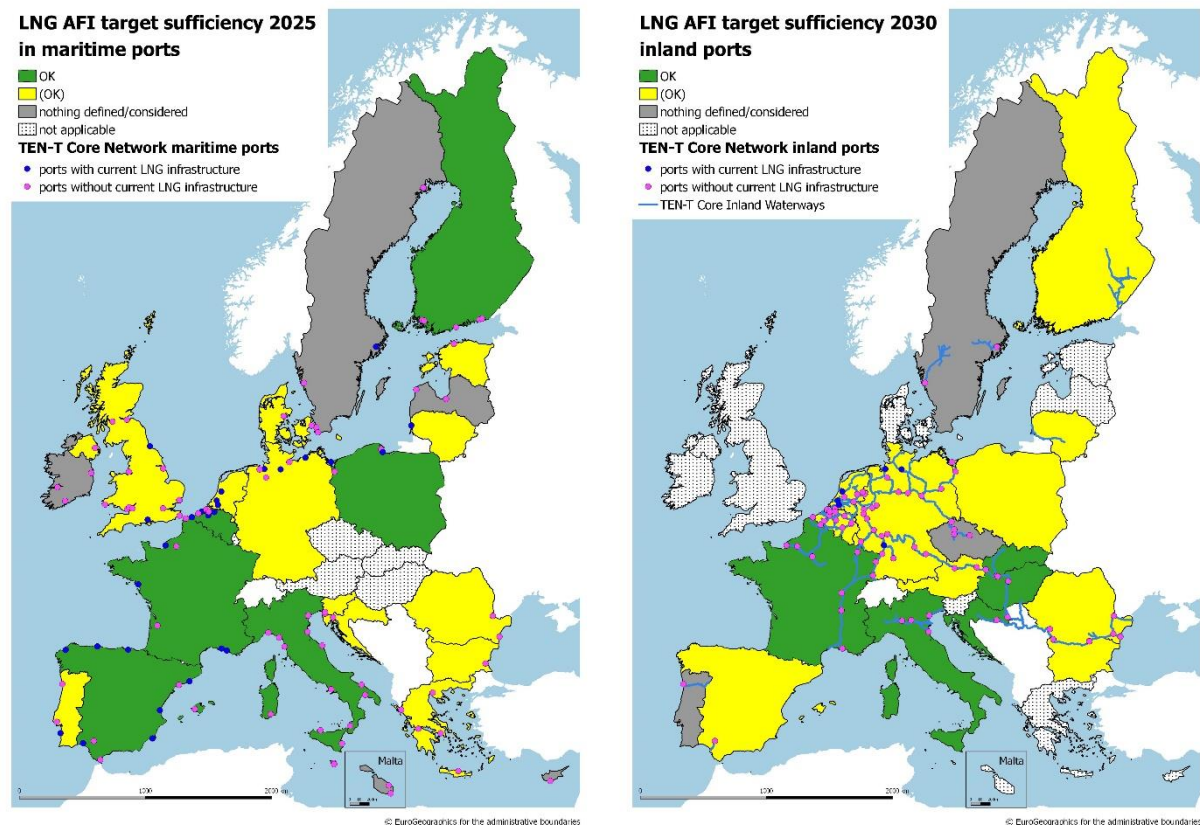


Figure 4-7: Results of the assessment for the sufficiency of LNG refuelling points in TEN-T Core Network maritime ports (left map) and LNG refuelling points in TEN-T Core Network inland ports (right map).

Some NPFs aim at exploiting synergies between CNG, LNG and road and waterborne transport.

Hydrogen refuelling points

Hydrogen is included in 15 NPFs³³ (Austria, Belgium, Bulgaria, the Czech Republic, Germany, Estonia, Spain, Finland, France, Hungary, Italy, the Netherlands, Sweden, Slovenia and the UK) and some Member States, for example Germany, have defined ambitious targets for hydrogen infrastructure. The map in Figure 4-8 shows the targets for hydrogen refuelling points across Member States by 2025 and Figure 4-9 gives an overview of the 2025 hydrogen refuelling point targets per NPF and current level of target achievement. First steps towards deployment of hydrogen vehicles and refuelling infrastructure are taking place, however it can be noted that while in central Europe hydrogen refuelling infrastructure will be deployed this will not be the case in North Eastern Europe.

³³ The Danish NPF discusses hydrogen but does not commit to infrastructure targets for hydrogen.

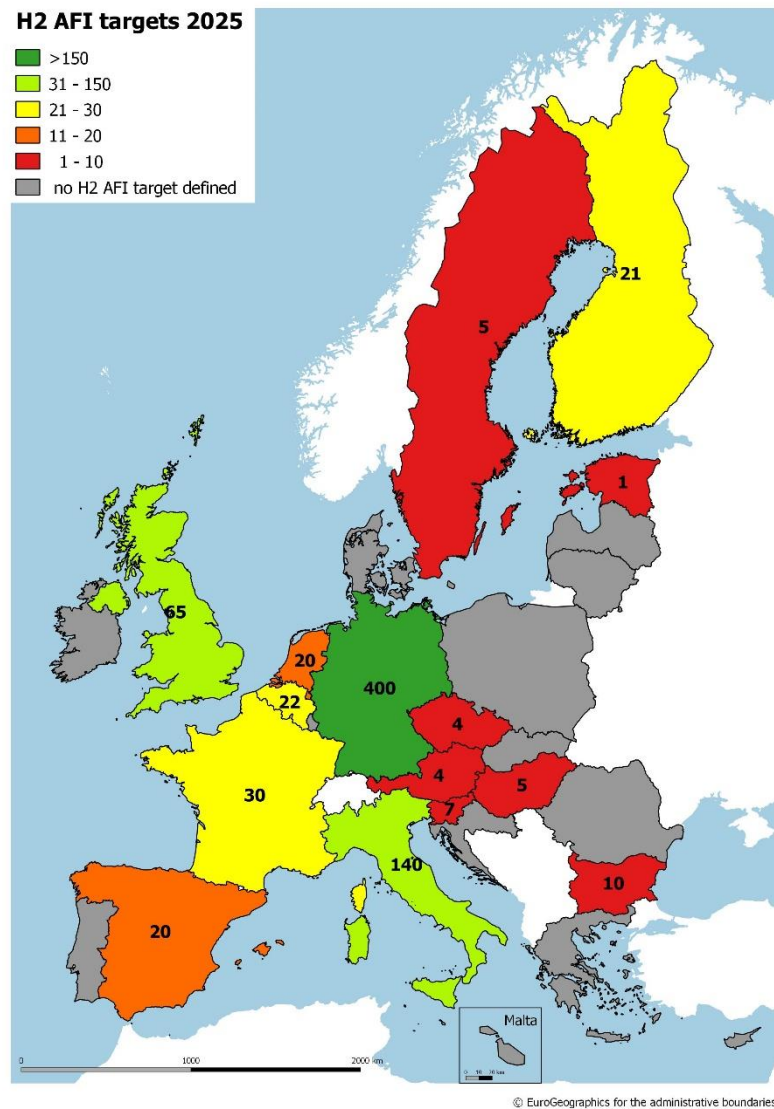


Figure 4-8: NPF targets for hydrogen refuelling points for 2025

Figure 4-10 shows the maximum distance between hydrogen refuelling points that would be achieved, when they are evenly distributed on the road TEN-T Core Network within each Member State, if the 2025 targets of the NPFs are achieved. For most of the Member States that have defined targets for hydrogen refuelling the maximum distance would be, by a large margin, below 300 km.

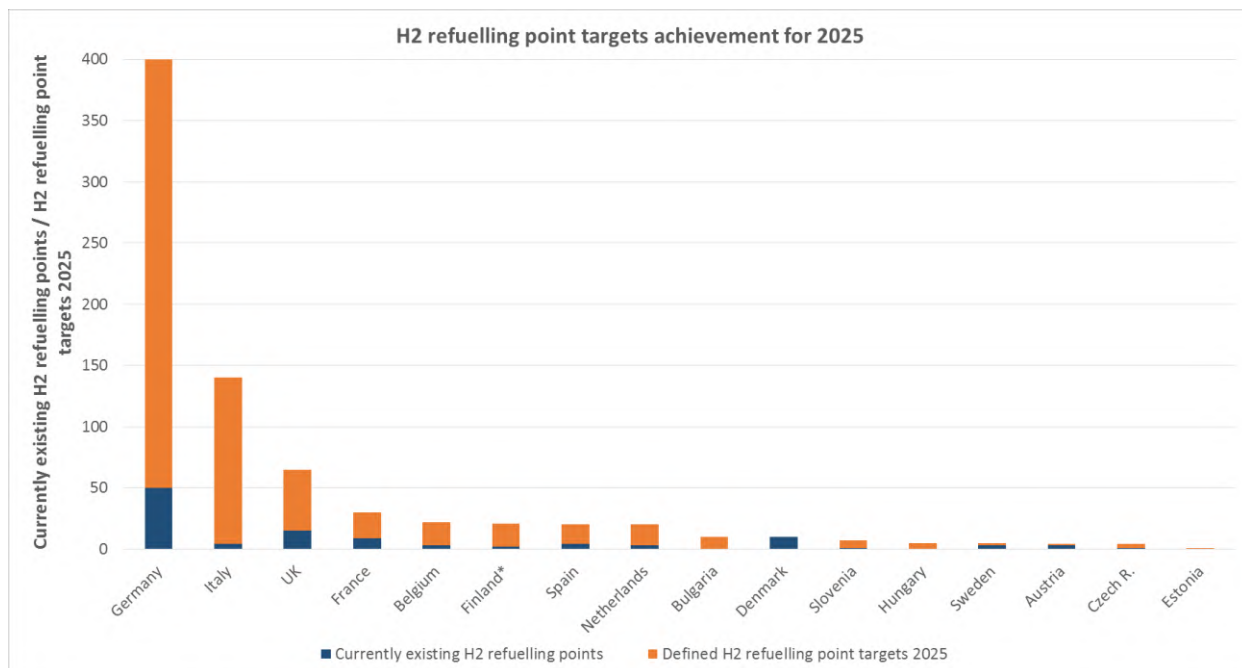


Figure 4-9: NPFs' 2025 hydrogen refuelling point targets, level of attainment³⁴

³⁴ Member states ordered by their targeted number of hydrogen refuelling points for 2025 (from high to low). No data available for the member states that did not include hydrogen targets in their NPF (Cyprus, Estonia, Greece, Ireland, Lithuania, Luxembourg, Latvia, Malta, Poland, Portugal, Romania and Slovakia).

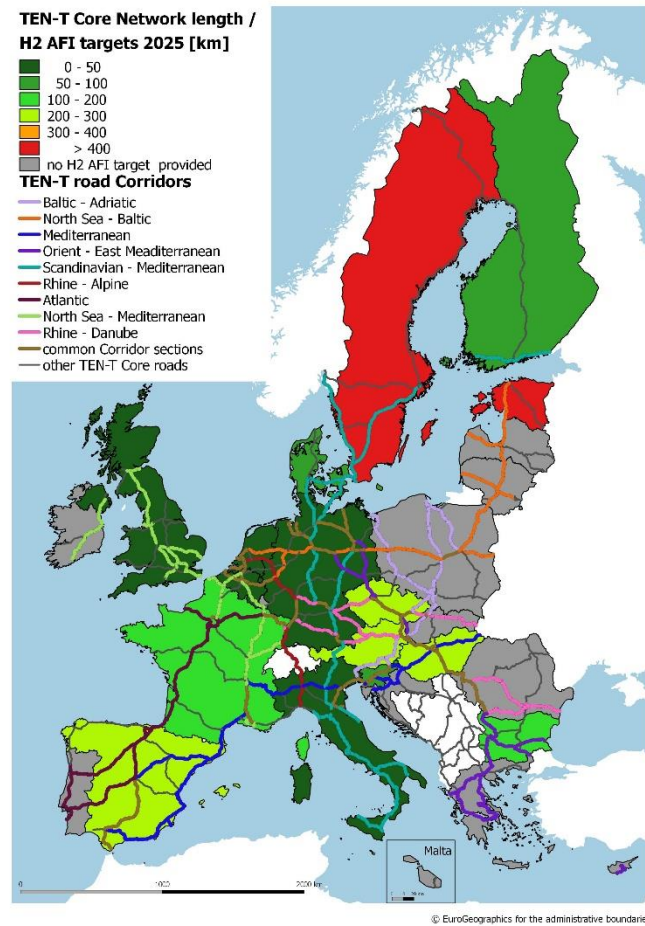


Figure 4-10: Average distance of hydrogen refuelling points for 2025 when evenly distributed on road TEN-T Core Network within Member States (according to NPF targets)